

**LBNO
"PEE WEE®" ANCHOR PENDANT SOCKETS**

All ORIGINAL "PEE WEE®" Sockets are delivered with:

- Alloy Steel
 - Individual heat treatment serialization – Traceable
 - Test bar analysis – Traceable
 - 100% visual inspection – Traceable
 - MPI test – Traceable
 - Pulled two times SWL of highest grade wire – Traceable
 - Fitted for "RFID" chips as required
 - Spelter socket terminations have an efficiency rating of 100%, based on the catalog strength of wire rope.
- Ratings are based on use with 6 x 7, 6 x 19, or 6 x 37, IPS or XIP (EIP), XXIP (EEIP), RRL, FC, or IWRC wire rope



ALLOY CAST STEEL

Wire Rope Diam.	DIMENSION IN INCHES										Weight Pounds Each Galv.	MBL (Short Tons)	CAST ANCHOR PENDANT SOCKET LB314	The ORIGINAL "PEE WEE®" Mooring Sockets PAT. #290-339 GALVANIZED
	A	B	C	D	F	G	H	J	K	L				
2 - 2 1/8	15 1/2	2	8	4 5/16	2 1/4	3 3/4	6 1/2	8 1/4	2 1/16	5 1/4	63	*		Caution: When attaching spelter sockets to wire rope, it is important to follow standard procedures as described by the Wire Rope Technical Board. Brooming and cleaning of wire rope is important. When resin is used, follow manufacturer's assembly instructions.
2 1/4 - 2 3/8	17 1/4	2 3/8	8 5/8	5 1/4	2 1/2	4 1/16	7	9	2 3/8	5 7/8	73	359		
2 1/2 - 2 5/8	20	2 3/4	11	5 3/4	2 3/4	4 3/4	9 3/4	10 1/8	2 3/4	7 1/4	156	483		
2 3/4 - 2 7/8	21	3	12	6 3/4	3 1/8	5 1/8	10 1/2	11	3 1/8	7	200	*		
3 - 3 1/8	22 7/8	3 1/8	13 1/8	6 3/4	3 3/8	5 3/8	10 7/8	11	3 3/8	8 3/4	230	681		
3 1/4 - 3 1/2	26	3 3/4	14 3/4	8 3/4	3 7/8	6 3/8	12 3/4	13 1/2	3 5/8	9 1/4	346	860		
3 3/4 - 4	28 3/4	4	16 1/2	9	4 3/8	7 3/8	14	15	4	10	482	1039		
4 1/4 - 4 1/2	31 1/2	4 1/2	19	10	4 5/8	7 3/4	16	15 1/2	5 1/16	11 1/2	600	*		
4 3/4 - 5	34 1/4	5	19 1/2	12	5 3/8	8 3/16	16 1/2	17	5 1/4	12 1/4	700	*		


Dimensions in accordance with Standard Foundry Practice

OPEN WEDGE SOCKETS

Important features: Longer wire rope service life; superior strength in the connection between rope and socket; and, greater safety and protection for both men and equipment. LBNO sockets are complete with flat round-headed pins with cotter keys. Threaded pins and nuts can also be furnished.



IMPROVED OPEN WEDGE TYPE SOCKETS			DIMENSION IN INCHES											CAST STEEL HEAT TREATED	
LBNO* Socket Number Complete	LBNO** Wedge Number	Rope Diameter Inches	A	B	C	D	E	F	G	H	J	K	L	Ø PIN N	Weight Pounds Each Complete
			LB-172	LB-172-W	5/16 & 3/8	2 9/16	2 1/16	5 9/16	1 3/4	1 1/8	2 13/16	2 1/4	5/8		
LB-173	LB-173-W	7/16 & 1/2	3 1/4	2 7/16	6 3/4	2	1 1/4	3 7/16	2 11/16	3/4	1 1/2	1	1 3/4	1	5
LB-174	LB-174-W	9/16 & 5/8	4 1/8	3 1/8	8 5/8	2 1/2	1 1/2	4 1/4	3 5/16	1	1 7/8	1 1/4	2 1/8	1 3/16	9 1/2
LB-175	LB-175-W	3/4	5 1/2	3 7/8	11	3	1 7/8	5 3/16	3 7/8	1 1/4	2 3/8	1 1/2	2 5/8	1 3/8	18 1/2
LB-176	LB-176-W	7/8 & 1	6 3/8	5 5/16	13 7/8	4	2 1/2	6 5/8	5 3/16	1 5/8	3 1/8	2	3 1/2	2	37
LB-177	LB-177-W	1 1/8 & 1 1/4	7	6 3/16	16	5	2 7/8	7 1/2	5 7/8	2	3 5/8	2 1/2	4 1/8	2 1/2	59 1/2
LB-178	LB-178-W	1 3/8 & 1 1/2	7 3/4	7 1/16	18 1/8	5 3/4	3 1/4	8 3/4	6 7/8	2 3/8	4 1/4	3	4 7/8	2 3/4	94
LB-179	LB-179-W	1 5/8 & 1 3/4	9	7 3/4	20 7/8	7 1/4	3 3/4	9 7/8	7 13/16	2 1/2	4 1/2	3 1/2	6 1/4	3 1/2	136 1/2
LB-180	LB-180-W	2 & 2 1/4	11	10	25 5/8	8	4 1/2	13 1/8	10 3/4	3	5 1/4	4	6 1/2	3 3/4	241 1/2

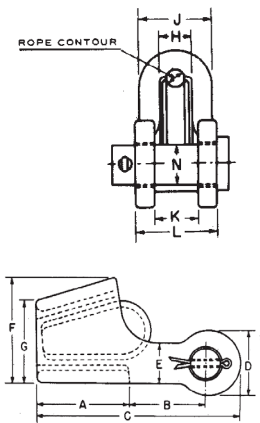

*Includes Wedge Pin and Cotter Keys
**Wedge Only.
Dimensions are in accordance with Standard Foundry Practice.



DCL MOORING & RIGGING

4400 North Galvez Street, New Orleans, LA 70117, U.S.A.
Tel: +1-504-944-3366 • Toll Free: 1-800-228-7660 • Fax: +1-504-947-8557
Email: sales@dcl-usa.com
www.dcl-usa.com