



# UP548T 3/8"-2"




Tested and Certified by  
JAPMO RPT to NSF/ANSI 61  
and NSF/ANSI 372 for lead  
free compliance.

**Bronze Lift Check Valve For Potable Water**  
**250 psig WOG †**  
**PTFE Disc**  
**Spring Loaded • Threaded Ends**

## MATERIALS LIST

| ITEM | PART        | MATERIALS       | ASTM SPEC.  |
|------|-------------|-----------------|-------------|
| 1    | Body        | Cast Bronze     | B584 C89833 |
| 2    | Tail Piece  | Cast Bronze     | B584 C89833 |
| 3    | Disc        | PTFE            | Commercial  |
| 4    | Disc Holder | Cast Bronze     | B584 C89833 |
| 5    | Spring      | Stainless Steel | A276 S30400 |

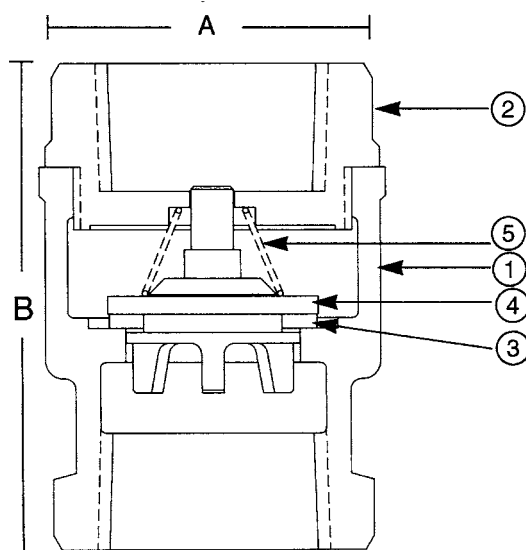

## DIMENSIONS

| Units  | Size  | A    | B    | Cv   |
|--------|-------|------|------|------|
| INCHES | 3/8   | 1.22 | 1.97 | 2.5  |
| mm     |       | 31   | 50   |      |
| INCHES | 1/2   | 1.22 | 2.09 | 4.1  |
| mm     |       | 31   | 53   |      |
| INCHES | 3/4   | 1.50 | 2.31 | 7.6  |
| mm     |       | 38   | 59   |      |
| INCHES | 1     | 1.91 | 2.66 | 13.0 |
| mm     |       | 48   | 67   |      |
| INCHES | 1 1/4 | 2.16 | 3.09 | 23.0 |
| mm     |       | 55   | 79   |      |
| INCHES | 1 1/2 | 2.59 | 3.31 | 31.0 |
| mm     |       | 66   | 84   |      |
| INCHES | 2     | 3.13 | 3.78 | 54.0 |
| mm     |       | 79   | 96   |      |

† Non-Shock

**Note:** Check Valves may be installed in both the horizontal and vertical lines with upward flow or in any intermediate position.

**Note:** Lead free refers to the wetted surface of the pipe, fittings and fixtures in potable water systems that have a weighted average lead content ≤0.25%. Source: California Health and Safety Code (116875).

Accurate as of 5/25/17. For the most current information access [www.milwaukeevalve.com](http://www.milwaukeevalve.com)

