



UP1502* 3/8"-2"



Tested and Certified by
 IAPMO R&T to NSF/ANSI 61
 and NSF/ANSI 372 for lead
 free compliance

Bronze Globe Valve For Potable Water
300 psig WOG †
Bronze Disc


Threaded Bonnet • Solder Ends

Dimensions and Workmanship Conform to MSS SP-80

*1/2" sizes has the disc integral with the stem and have no disc ring.

MATERIALS LIST

ITEM	PART	MATERIALS	ASTM SPEC.
1	Body	Bronze	B584 C89833
2	Bonnet	Bronze	B584 C89833
3	Disc	Bronze	B584 C89833, ASTM
		Brass	B21 C46400, H02
4	Stem	Bronze	B21 C46400, H02
5	Disc Ring	Brass	B21 C46400, H02
6	Packing	Graphite	Commercial
7	Packing Nut	Brass	B16 C30000
8	Handwheel	Mall. Iron	Commercial
9	Identification Plate	Aluminum	Commercial
10	Handwheel Nut	Brass	Commercial

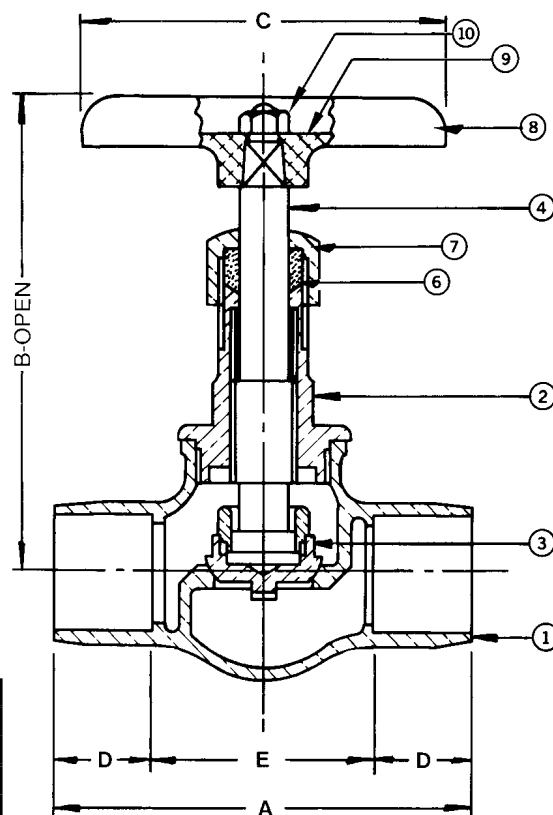

DIMENSIONS

Units	Size	A	B	C	D	D	Cv
INCHES	3/8	2.00	3.19	2.00	0.38	1.25	2.2
mm		51	81	51	10	32	
INCHES	1/2	2.44	3.75	2.25	0.50	1.44	3.6
mm		62	95	57	13	37	
INCHES	3/4	3.19	4.00	2.50	0.75	1.69	6.7
mm		81	102	64	19	43	
INCHES	1	3.69	4.38	2.75	0.91	1.88	11.1
mm		94	111	70	23	48	
INCHES	1 1/4	4.19	5.13	3.13	0.97	2.25	20.0
mm		106	130	79	25	57	
INCHES	1 1/2	4.75	5.63	3.50	1.09	2.56	28.0
mm		121	143	89	28	65	
INCHES	2	5.94	6.69	4.00	1.34	3.25	48.0
mm		151	170	102	34	83	

† Non-Shock

Note: Lead free refers to the wetted surface of the pipe, fittings and fixtures in potable water systems that have a weighted average lead content ≤0.25%. Source: California Health and Safety Code (116875).

Accurate as of 5/25/17. For the most current information access www.milwaukeevalve.com

