


Introduces:

SOLAS regulations II-2/15.5.1, II-2/15.3 and II-2/15.4 require oil fuel, Lubricating oil and other flammable oil piping to be screened or otherwise suitably protected to avoid as practicable oil spray. This note provides guidance to comply with these regulations.

Application Scope:

Anti-Splashing Tape is applied to around flanged joints, bonnets of valve and any other threaded connections on liquid pipe system (fuel oil, lubricating oil) under pressure which are located in ship's engine room and others.

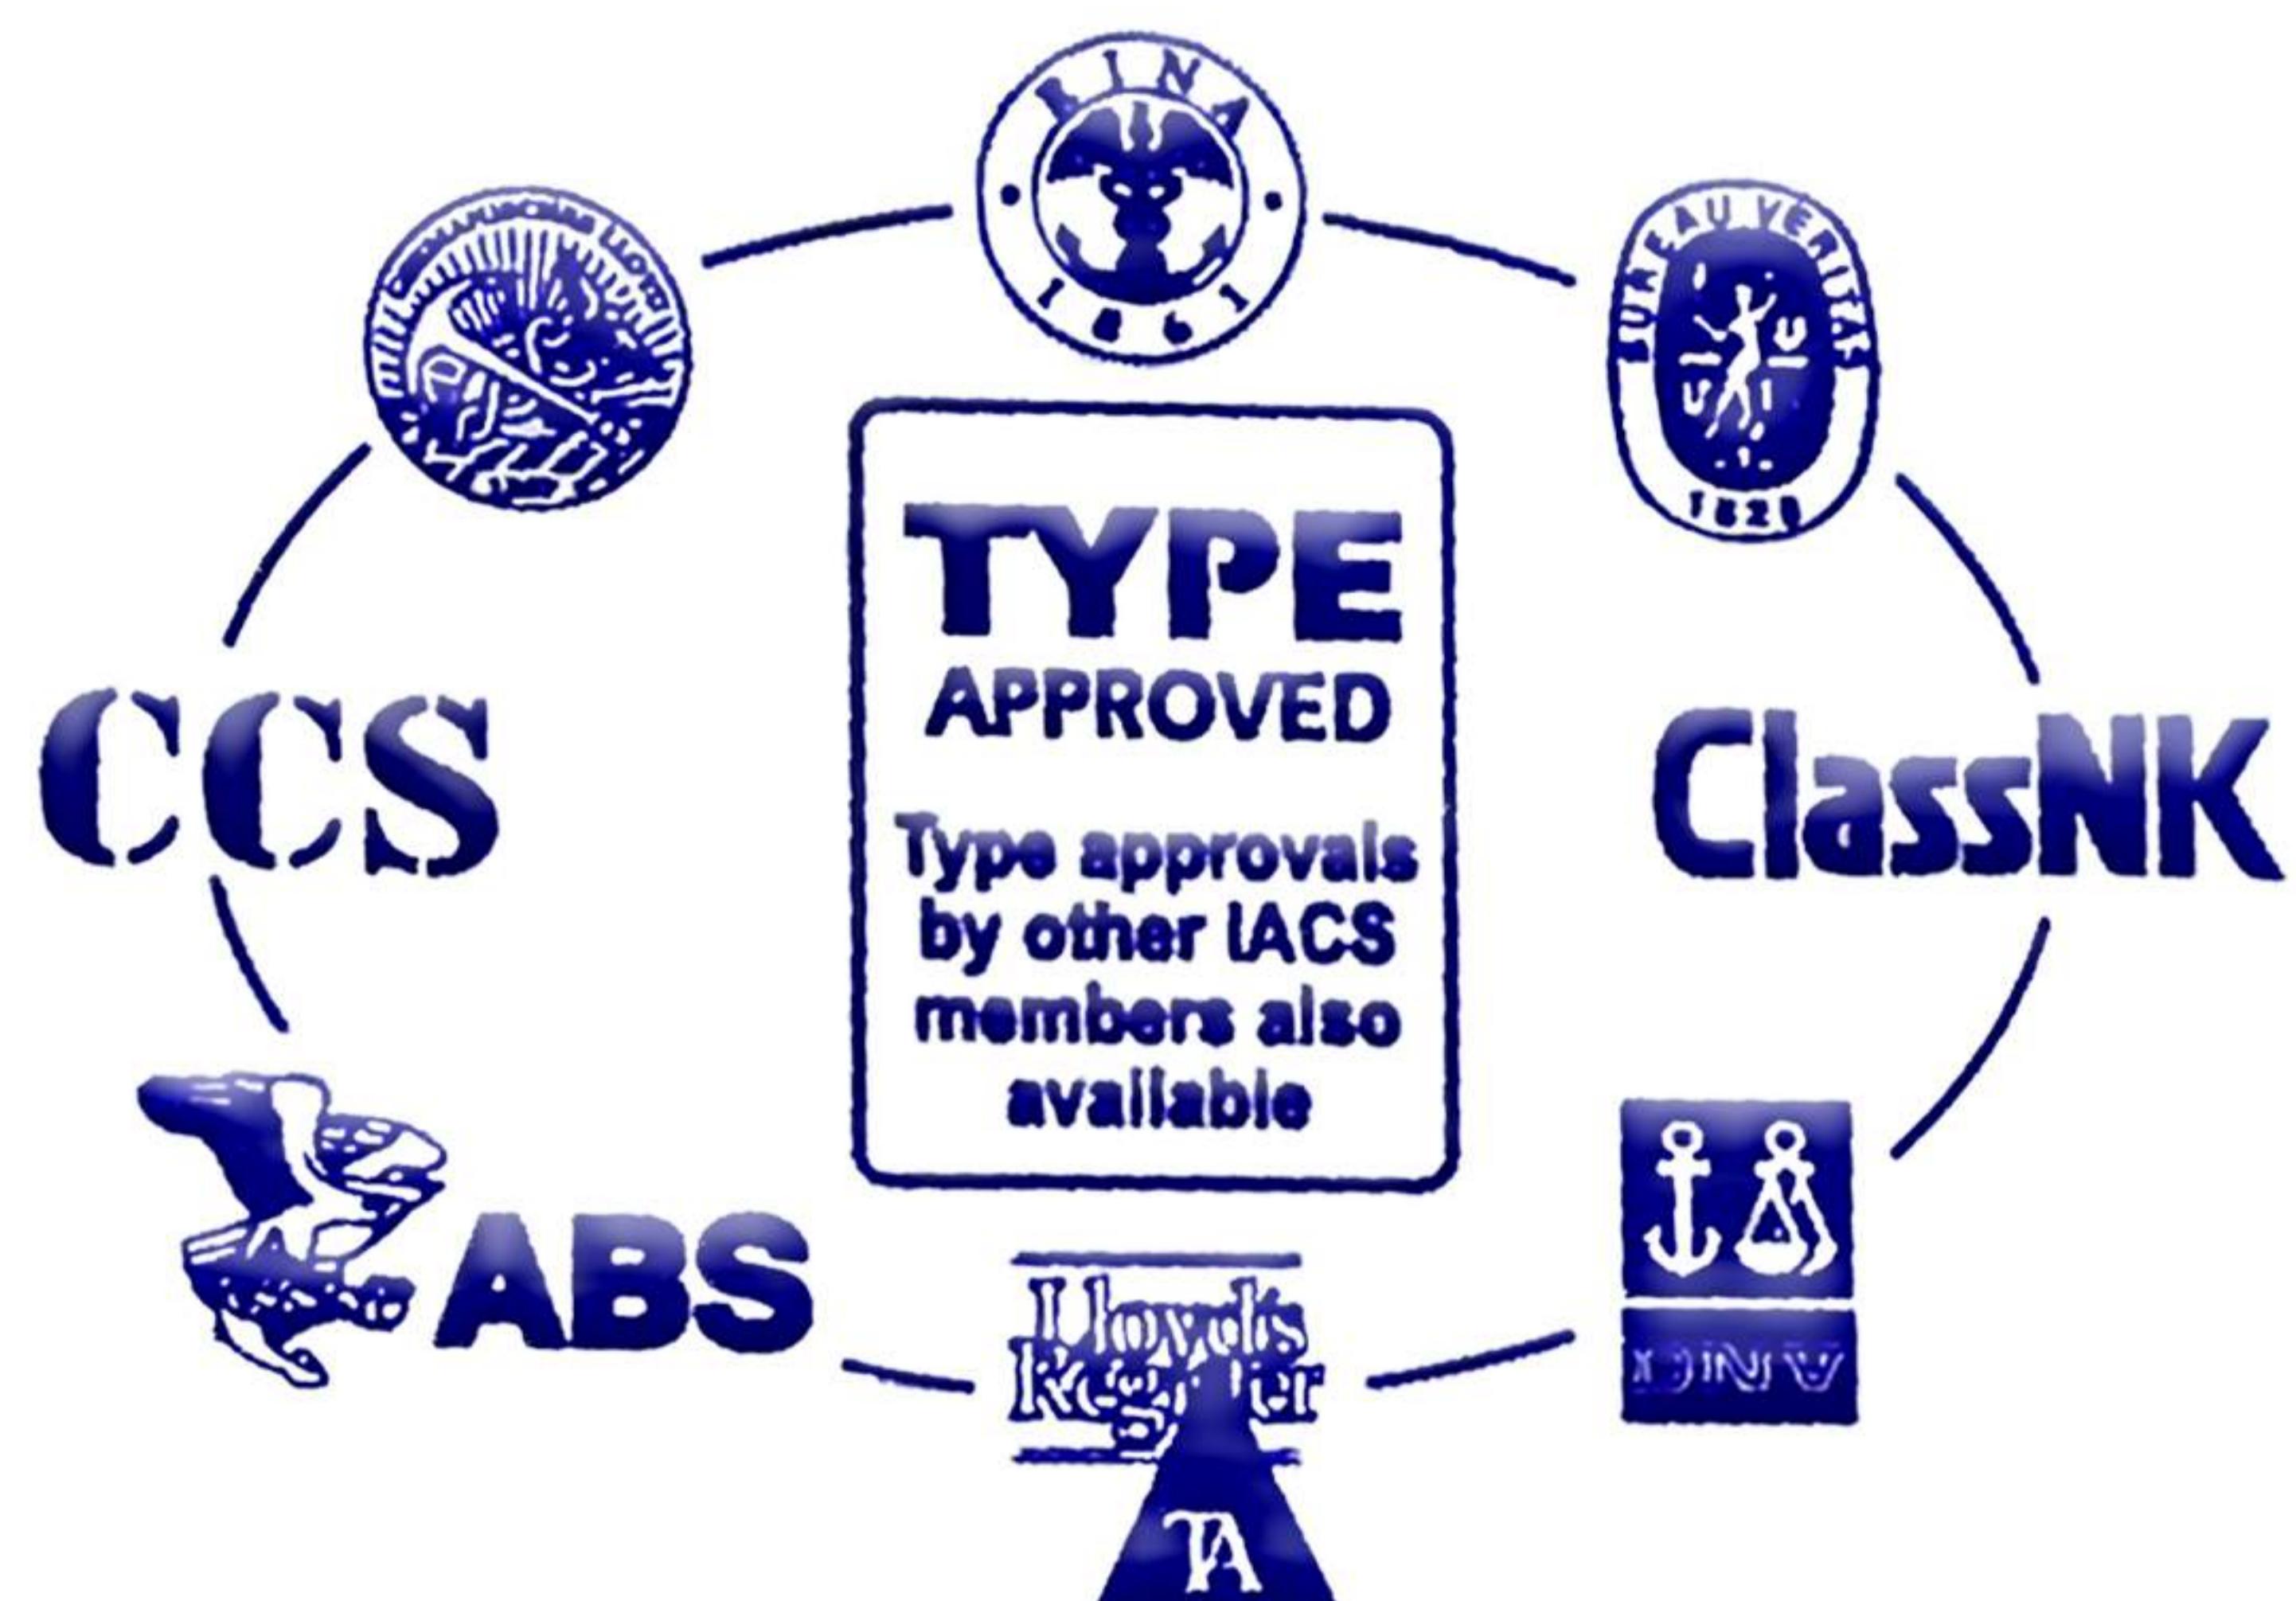

SIZES:

Wide x Length	IMPA	HS-Code
35mm x 10m	871801	39191080
50mm x 10m	871802	39191080
75mm x 10m	871808	39191080
100mm x 10m	871804	39191080
140mm x 10m	871803	39191080
250mm x 10m	871807	39191080
500mm x 10m	871805	39191080
1000mm x 10m	871806	39191080

CHARACTERISTICS:

Adhesive strength	5.0N/cm
Flammability	-160°C ~ +200°C
Pressure Resistance	40kgf/cm ²
Oil Resistance	Inactive with respect to heavy oil, light oil, gasoline, lubricating oil, etc.
Tensile strength	200N/cm

Please contact us!