

MMC INTERNATIONAL CORP.

DECK COVERS

For Standard 12-1/2" (320mm) Deck Openings • Bronze Standard

Either deck cover is simply dropped into place to create a secure oil-and-watertight closure.



A self-contained, reusable Buna-N "O" ring gasket (standard) assures a gas tight deck seal.

"L" shape seal also available for pitted deck surfaces.




CL DECK COVER

Cover is operated by rotating each of three helical cams one-half turn. Only one second is needed for each cam to lock or unlock the cover.



New installation
No drilling fastener holes
No doubler rings needed

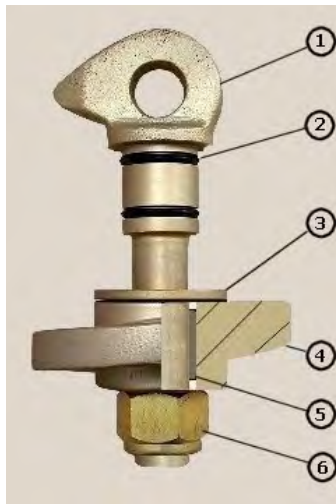


- ① Cam Bolt
Std. / Long, Bronze
- ② "O" Ring (2)
Buna-N, Viton, Teflon
- ③ Spacer, per
Deck Thickness
- ④ Cam, Helical, Bronze
- ⑤ Key, Square
Stainless Steel
- ⑥ Nut, Hex. Brass
Self-Locking



Special 4-cam
CL cover with
valve mount

CENTALOCK DECK COVER

Cover is operated by rotating the center handle.
Centalock cover is flush to deck surface, does not require tools to open and close.

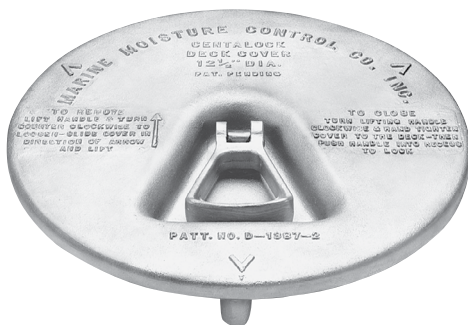

Top View



Bottom View

Restricted and Closed Electronic Gauging Tapes • Tank Sampling Systems
Vapor Control Valves • Restricted and Closed Sampling Systems
C-L Couplings • C-L and Centalock Covers



Phone: 1-800-645-7339
Web: <http://www.mmciintl.com>
E-Mail: info@mmciintl.com
TradeNet ID 52539