

EATON CROUSE-HINDS PAULUHN

## NON-METALLIC, WATERTIGHT, HAZARDOUS LOCATION INCANDESCENT, COMPACT, FLUORESCENT AND HID LIGHTING FIXTURES



700



701



702

**CONSTRUCTION:** Impact and corrosion resistant fiberglass reinforced polyester, with stainless steel hardware and with impact and corrosion resistant nylon guard.

**APPROVALS:** CSA Class I Division 2 Groups A, B, C & D; Class I Zone 2 Groups F & G; Class III – ABS, Type 4X, and conforms to IP66.

**OUTLETS:** All junction box units on the ceiling and wall mount versions are supplied with four 3/4" N.P.T. knockouts. The pendant unit is mounted by one 3/4" N.P.T. outlet.

**LAMP HOLDERS:** Polycarbonate lampholders supplied with compact fluorescent. Porcelain lampholders are supplied with incandescent version.


**VOLTAGE:** Supplied to operate at 120V AC 60 Hz as standard. Compact fluorescent units only can be supplied to operate on 120V or 277V AC 60 Hz.

**LENS:** Clear glass globe is supplied as standard. See options below.

**GASKET:** One-piece silicone gasket provides a watertight seal.

**TEMPERATURE CODE:** Temperature rating for incandescent is T3. Compact fluorescent is T3C at a 40°C ambient temperature.

### DIMENSIONS:

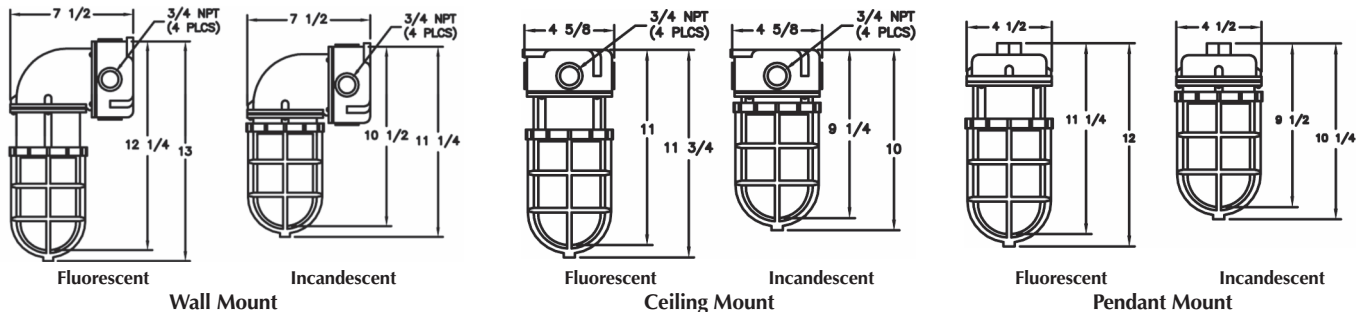

### ORDERING REFERENCES

WORKED ORDERING EXAMPLE		1.	2.	3.	4.
Wall mount, 18W compact fluorescent luminaire 120V AC 60 Hz with red glass globe		F702	18	Blank	RED
<b>(1) SERIES</b>		<b>(2) LAMP WATTAGE AND TYPE</b>		<b>(4) GLOBE</b>	
<b>CEILING MOUNT</b>		15 - 150W max incandescent		Blank -Clear Glass globe	
700	Incandescent	9 - 9W compact fluorescent		AMB -Amber Glass globe	
F700	Compact Fluorescent	13 - 13W compact fluorescent		BLU -Blue Glass globe	
<b>PENDANT MOUNT</b>		18 - 18W compact fluorescent		GRN -Green Glass globe	
701	Incandescent	26 - 26W compact fluorescent		RED -Red Glass globe	
F701	Compact Fluorescent	32 - 32W compact fluorescent		HR -Tempered Glass	
<b>WALL MOUNT</b>		<b>(3) VOLTAGE/FREQUENCY</b>		X* -Polycarbonate globe	
702	Incandescent	Blank - 120V 60 Hz		GW -Stainless Steel Wire guard	
F702	Compact Fluorescent	276 - 277V 60 Hz (Compact Fluorescent only)		RP** -Reflector Prismatic	
				* Guard not provided, available only with GW option.	
				** Not for use with GW option or wall mount.	

**Crouse-Hinds**  
by **EATON**