

EATON CROUSE-HINDS PAULUHN

FLUORESCENT RECESSED FIXTURES FOR MODULAR TYPE CEILINGS "DAMPA" CEILINGS

20W & 40W – U.L. Marine – U.S.C.G.



FDA220PER

CONSTRUCTION: Corrosion resistant polyester powder coated steel housings. Standard is white finish, optional "color match" to ceiling can be specified.

DIFFUSER: Acrylic clear prismatic is standard, optional "color match" to frame can be specified.

LAMPS: Choice of two lamps in 17W, 20W, 32W or 40W.

TERMINAL BLOCK: A phenolic terminal block is supplied with the fixture for convenience and ease of wiring.

BALLAST: The standard ballast supplied is HPF, 120V AC, 60 Hz. An optional Emergency Ballast "EM" is available.

LAMPHOLDER: Locking lampholders provide maximum resistance to shock and vibration.

MOUNTING: The FDA models are designed to integrate with modular continuous ceiling systems. The suffix "PAR" is for fixtures that mount parallel to the ceiling frames, the suffix "PER" is for fixtures that mount perpendicular to the ceiling frames.

Description	Lamp Size	Weight	Catalog No.
Parallel Type	2 x 17W	14 lbs.	FDA217PAR
	2 x 20W	15 lbs.	FDA220PAR
	2 x 32W	23 lbs.	FDA232PAR
	2 x 40W	23 lbs.	FDA240PAR
Perpendicular Type	2 x 17W	15 lbs.	FDA217PER
	2 x 20W	16 lbs.	FDA220PER
	2 x 32W	25 lbs.	FDA232PER
	2 x 40W	25 lbs.	FDA240PER

INCANDESCENT MIRROR/DESK OR BERTH LIGHT

Wall Mounting With Outlet and Toggle Switch

U.S.C.G. Approved

U.L. Listed 1598A ABS

Inside Type Marine 120VAC 60 Hz




Adjustable Shade, 60W lamp
Aluminum—Cat. No. 1060A

FLUORESCENT RECESSED BERTH & MIRROR FIXTURES

(2) 8W – 120 or 220VAC – U.L. Marine – U.S.C.G.

FB28F

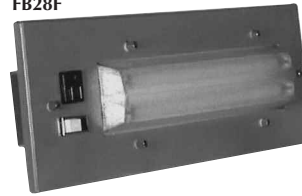

FB28FADJ
w/ Adjustable Shade

CONSTRUCTION: Marine grade copper-free aluminum, non-corrosive anodized type, polyester powder coated frame with a white, high gloss polyester powder coated reflector.

SWITCH / STARTER: Push type momentary contact switch is standard. A double pole toggle switch is optional.

DIFFUSER: Clear fluted lens for increased light distribution.

LAMPS: 1 or 2 fluorescent 8W F8T5. Lamp is included with this fixture.


ADJUSTABLE SHADE: Add suffix "ADJ" to Catalog No.

BALLAST: Low power factor 120V 60 Hz is standard. Other voltages and 50 Hz are available on application.


CONVENIENCE OUTLET: A 125V 3 wire – 2 pole "U" ground is standard. For a fixture without the receptacle add suffix "LCO".

Description	Lamp Size	Alum. Weight	Alum. Cat. No.
Fluorescent Recessed	(1) F8T5 / CW	3-1/2 lbs. (1.59 kg)	FB18F
	(2) F8T5 / CW		FB28F

INSIDE TYPE RECESSED CEILING FIXTURE
U.L. 1598A, U.S.C.G., ABS

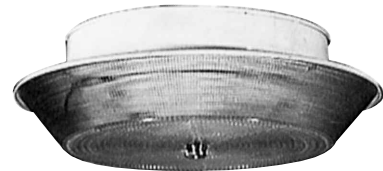

F1167

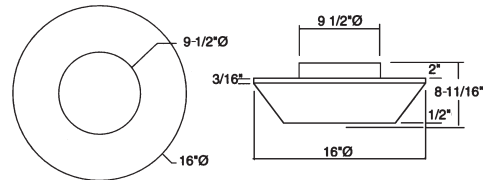

- Corrosion resistant housing in spun cold-rolled steel.
- The diffuser is an injected molded clear prismatic polycarbonate drop lens.
- The reflector is steel with a high gloss white polyester powder coat.
- The ballast is a high factor 120V 60 Hz; 277V 60 Hz optional.
- The unit comes with 2- 13W, 18W or 26W compact fluorescent lamps.

Description	Lamp Size	Weight	Steel Cat. No.
Inside Dripproof Fixture	(2) 13W compact	7 lbs. (3.18 kg)	F1167-13
Inside Dripproof Fixture	(2) 18W compact	7 lbs. (3.18 kg)	F1167-18
Inside Dripproof Fixture	(2) 26W compact	7 lbs. (3.18 kg)	F1167-26