

KAHLENBERG INDUSTRIES, INC.


ELECTRIC PISTON HORNS

- USCG/IMO CERTIFIED AVAILABLE FOR VESSELS OVER 75 METERS IN LENGTH AND OVER 200 METERS IN LENGTH
- ELECTRIC PISTON HORNS REQUIRE NO EXTERNAL AIR SOURCE
- OIL-LESS CRANKCASE AND GEARCASE
- 7.5 H.P. ELECTRIC MOTOR DRIVEN, 208-440 A.C., 50 & 60 Hz.
- SINGLE PHASE A.C. OR 24 VOLT D.C. CONTROL CIRCUIT
- THERMOSTATICALLY HEATED FOR COLD WEATHER USE
- CONSTRUCTION: Type 356 cast aluminum. Steel mounting base. Stainless steel fasteners. Gray marine enamel finish.
- KPH-130 DETAILS: Weight: 220 lbs. (100 kg)
Dimensions: 39.3" L x 25" W x 33.25" H
Footprint: 19.87" L x 13.31" W
- EP-90 DETAILS: Weight: 375 lbs. (170 kg)
Dimensions: 56.0" L x 34.0" W x 34.0" H

KPH-130 ELECTRIC
PISTON HORNEP-90 ELECTRIC
PISTON HORN**AIR/STEAM WHISTLE**

For best results, whistle must be installed higher than surrounding buildings or other obstructions.

These whistles are made of cast bronze with one-piece polished brass bell. They are designed to operate on 50 to 200 P.S.I. air or steam pressure. The diameter of piping from air receiver or steam source to whistle must be large enough in capacity to maintain at least 50 P.S.I. at the base of the whistle.

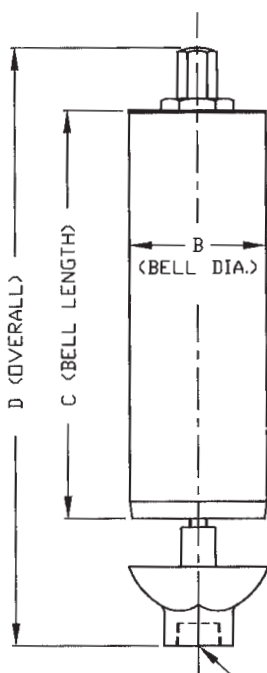

A (N.P.T. SIZE)

SPECIFICATION/DIMENSIONS WITHOUT MANUAL VALVE

FIGURE NUMBER		DIMENSIONS				AIR CONS. AT 100 P.S.I. (C.F.S.)	FREQ.	S.P.L. @ 1 M.	NET WT.
AIR	STEAM	A	B	C	D				
115 AMP	115 SMP	1/4"	1"	2-1/8"	4-1/2"	0.93	1500 Hz	132 dB (a)	.75 lb.
116 AMP	116 SMP	3/8"	1-1/2"	4-3/4"	9"	1.37	631 Hz	124 dB (a)	2.75 lbs.
117 AMP	117 SMP	1/2"	2"	5-7/8"	11-1/4"	3.65	500 Hz	122 dB (a)	3.5 lbs.
119 AMP	119 SMP	3/4"	3"	7-3/4"	13"	4.58	374 Hz	132 dB (a)	8.5 lbs.
120 ACP	120 SCP	1"	4"	12"	17-3/4"	7.03	249 & 326 Hz	137 dB (a)	18.5 lbs.
122 AMP	122 SMP	1-1/2"	6"	18"	25"	13.98	165 Hz	142 dB (a)	38 lbs.

KAHLENBERG INDUSTRIES, INC.

Tel: 920.793.4507



Fax: 920.793.1346

1700 12th STREET • P.O. BOX 358 • TWO RIVERS, WISCONSIN 54241 U.S.A.

**MARINE PRODUCTS
SINCE 1895**See and hear Kahlenberg air horns at
www.kahlenberg.com