

ACCORD INTERNATIONAL, INC.

UNIVERSAL TANK LID PACKING




Description: A hollow core of chemical resistant rubber with a protective layer of PTFE tape, surrounded by a thick cushion of defibrillated polypropylene with corners constructed of the same materials (braided into cords). Over the packing is a double layer of heavy-duty PTFE tape with a final outer protection of braided PTFE yarn. Maximum temperature 100°C (210°F); pH 0-14. Resistant to acids, alkalis, oils, solvents, chemicals and edible products. Available in 15mm to 50mm diameters, in coils (specify diameter and length) or ready-made rings (specify diameter and height).

Accord Style No. 3020 – Sizes as specified

MECHANICAL SHEET PACKINGS / GASKETING

When ordering, specify thickness, width and length.

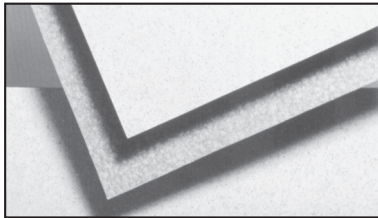

VEGETABLE FIBER OIL PROOF SHEET PACKING

Accord Style No. 641

Description: Pure fiber sheeting, chemically treated, 212°F, (100°C) maximum temperature.

Applications: Gaskets for use on oil, gasoline, benzene, grease, ketones, lacquers, glycerine, air, turpentine and alcohol.

Sizes: 1/64", 1/32", 1/16", 3/32", 1/8", 3/16", 1/4"

RED RUBBER SHEET PACKING

Accord Style No. 600

Description: SBR rubber.

Applications: Gaskets for hot and cold water, ammonia and air. 200°F (90°C) max. temp.; 125 lbs. max. pressure.

Sizes: 1/32", 1/16", 3/32", 1/8", 3/16", 1/4"

NEOPRENE SHEET PACKING

Accord Style No. 620

Description: Synthetic rubber.

Applications: Gaskets for oil and solvents, to 250°F (120°C).

Sizes: 1/32", 1/16", 3/32", 1/8", 3/16", 1/4"

OIL RESISTANT NITRILE SHEET PACKING

Accord Style No. 624

Description: Black, oil-resistant nitrile.

Applications: Gaskets for oil, gasoline, ammonia, moderate caustics and alkalis. Service to 250°F (120°C), 250 psi (17 kg/cm²).

Sizes: 1/32", 1/16", 3/32", 1/8", 3/16", 1/4"

PURE GUM SHEET PACKING

Accord Style No. 610

Description: Natural rubber floating stock.

Applications: Gasketing for portholes, water-tight doors and weatherstrips.

Sizes: 1/16" to 2"

CLOTH INSERTED SHEET PACKING – RUBBER

Accord Style No. 615

Description: Cotton duck inserted between two layers of rubber.

Applications: Gaskets for water and low-pressure steam: 250°F (120°C), 300 psi (21 kg/cm²).

Sizes: 1/16", 3/32", 1/8", 3/16", 1/4"

CLOTH INSERTED SHEET PACKING – NEOPRENE

Accord Style No. 615N

Description: Cotton duck inserted between two layers of neoprene.

Applications: Gaskets for water and low-temperature steam: 250°F (120°C), 250 psi (17 kg/cm²).

Sizes: 1/16", 3/32", 1/8", 3/16", 1/4"

MICA PACKING

Accord Style MICA


Description: Mica, reinforced with tanged stainless steel. Up to 950°C (1750°F).

Applications: Extremely temperature resistant. Constant material properties under alternating operating conditions. Exhaust gases.

Sizes: 1/16" and 1/8"



CORK SHEET PACKING



Accord Style No. 645

Description: Resilient cork sheeting; 200°F maximum temperature.

Applications: Diesel and gasoline engines crank case seal.

Sizes: 1/64", 1/32", 1/16", 3/32", 1/8"

"Se Habla Español"

4380 South Wayside
Suite 100
Houston, TX 77087

ACCORD
INTERNATIONAL, INC.

Phone: 713-641-2288
Fax: 713-641-3636
Toll Free: 800-532-2672
sales@accordintl.com
ventas@accordintl.com
www.accordintl.com