

AKRON BRASS COMPANY

COAST GUARD SHIPBOARD VARI-NOZZLES

A combination fog and straight stream nozzle designed for more efficiency with AFFF or water on board ships.

- Brass construction
- Low friction ball and dual seats for smoother operation
- Double row of molded teeth
- Rubber-like bumper and handle
- Constant gallonage in all fog and straight stream patterns
- Flush without shutting down
- 95 gpm (360 lpm) only



Style 3020

3020 1-1/2" Shipboard Vari-Nozzle with Pistol Grip

- 1-1/2" NH thread only
- USCG Approval No. 162.027/15/0

3022 1-1/2" Shipboard Vari-Nozzle

- 1-1/2" NH thread only
- USCG Approval No. 162.027/16/0

BRASS FOG NOZZLES

A combination fog and straight stream nozzle designed for more efficiency with foam or water on offshore rigs and in industrial applications.

- Double row of molded teeth
- Rubber-like bumper and handle
- Constant gallonage in fog and straight stream patterns
- Flush without shutting down
- 1-1/2" swivel inlet, unless noted
- Repair kits available

3015 Nozzle

- 95 gpm (360 lpm)

3016 Nozzle

- 125 gpm (475 lpm)

3019 Nozzle with Pistol Grip

- 95 gpm (360 lpm)

3021 Nozzle with Pistol Grip

- 125 gpm (475 lpm)

3025 Nozzle

- 250 gpm (950 lpm)
- 2-1/2" swivel inlet



Style 3019



Style 3025

BRASS IN-LINE EDUCTORS

Eductors featuring a large easy to read and removable metering dial with infinite settings between 0 and 6%. Detents at 1/4, 1/2, 1, 3 and 6%.

- 1-1/2" swivel inlet x 1-1/2" male
- 30" pickup hose standard, 48" optional
- Length: 7-3/4", weight: 9-1/4 lbs.

The Eductors are rated to flow at 200 psi (14 bar) inlet pressure and work well with nozzles rated at 75 and 100 psi (5 and 7 bar).


3070 60 gpm (230 lpm) In-Line Eductor**3071 95 gpm (360 lpm) In-Line Eductor****3072 125 gpm (475 lpm) In-Line Eductor****2325 95 gpm (360 lpm) Brass In-Line Eductor**

In-Line eductor designed for use at 125 psi (8.6 bar). (Note: Lower eductor inlet pressures reduce nozzle stream reach.)

- 1-1/2" swivel inlet x 1-1/2" male
- 95 gpm at 125 psi (360 lpm at 8.5 bar), 115 gpm at 200 psi (440 lpm at 14 bar)
- 1%, 2%, 3%, and 4% foam settings
- Removable foam pickup tube with metering dial for easy service and testing
- Length: 10-1/8", weight: 7 lbs.

2328 90 gpm (340 lpm) Brass In-Line Eductor

- 1-1/2" swivel inlet x 1-1/2" male
- Includes foam shutoff valve and 60" pickup hose
- Set at 6% pickup-rate, easily changed to 3%
- Length: 9-1/2", weight: 8 lbs.

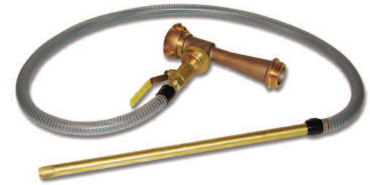

Style 2328

PORTABLE BY-PASS EDUCTORS

This by-pass eductor has a built-in by-pass chamber, allowing the operator to change from water to foam without shutting down.

- Brass with chrome trim
- Changes easily to water line use
- 8 quick-change handle positions with TSC Swing-Out valve handle
- Optional pipe thread connections available for truck plumbing
- Length: 18", weight: 20 lbs.



Style 3097

3062 60 gpm (230 lpm) By-Pass Eductor**3097 95 gpm (360 lpm) By-Pass Eductor****3127 125 gpm (475 lpm) By-Pass Eductor***"Se Habla Español"*

4380 South Wayside
Suite 100
Houston, TX 77087



ACCORD
INTERNATIONAL, INC.

Phone: 713-641-2288
Fax: 713-641-3636
Toll Free: 800-532-2672
sales@accordintl.com
ventas@accordintl.com
www.accordintl.com