


SEA-LINK PRODUCTS

**OVAL PATTERN REGULAR WIRE ROPE BLOCKS\***

Standard Fittings

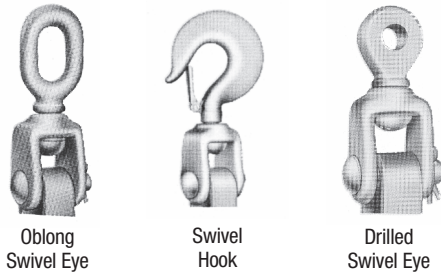


Oblong Swivel Eye

Swivel Hook

Drilled Swivel Eye

Other Fittings Available

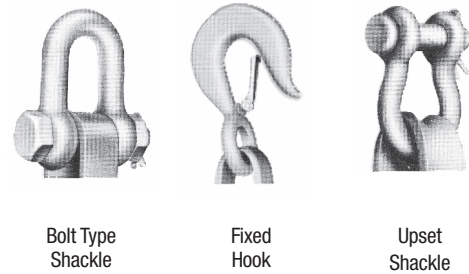


Bolt Type Shackle

Fixed Hook


Upset Shackle




Single Sheave Block with Oblong Swivel Eye



Double Sheave Block with Drilled Swivel Eye and Shackle



Triple Sheave Block with Swivel Hook



	Size		Sheave Size		Rope Diameter		Center Pin Size		Working Load Limit		With Oblong Swivel Eye		With Swivel Hook		With Drilled Swivel Eye and Shackle				
	in.	mm	in.	mm	in.	mm	in.	mm	lbs.	kg	Weight		Weight		Weight				
											Model No.	lbs.	kg	Model No.	lbs.	kg	Model No.	lbs.	kg
<b>SINGLE SHEAVE BLOCK</b>	4	102	4	102	3/8	10	1/2	38	2200	1000	<b>SL661B-40S</b>	8.2	3.7	<b>SL661B-4SH</b>	8.2	3.7	<b>SL661B-4DS</b>	8.2	3.7
	6	152	6	152	3/8	10	5/8	16	4400	2000	<b>SL661B-60S</b>	15	6.8	<b>SL661B-6SH</b>	15	6.8	<b>SL661B-6DS</b>	15	6.8
	8	203	8	203	1/2	12.7	3/4	19	5500	2500	<b>SL661B-80S</b>	28	12.7	<b>SL661B-8SH</b>	28	12.7	<b>SL661B-8DS</b>	28	12.7
	10	254	10	254	5/8	16	1	25.4	6600	3000	<b>SL661B-100S</b>	38	17.2	<b>SL661B-10SH</b>	38	17.2	<b>SL661B-10DS</b>	38	17.2
	12	304	12	304	3/4	19	1-1/4	32	8800	4000	<b>SL661B-120S</b>	62	28.1	<b>SL661B-12SH</b>	62	28.1	<b>SL661B-12DS</b>	62	28.1
<b>DOUBLE SHEAVE BLOCK</b>	4	102	4	102	3/8	10	1-1/2	38	3300	1500	<b>SL662B-40S</b>	14	6.4	<b>SL662B-4SH</b>	14	6.4	<b>SL662B-4DS</b>	14	6.4
	6	152	6	152	3/8	10	5/8	16	5500	2500	<b>SL662B-60S</b>	21	9.5	<b>SL662B-6SH</b>	21	9.5	<b>SL662B-6DS</b>	21	9.5
	8	203	8	203	1/2	12.7	3/4	19	7700	3500	<b>SL662B-80S</b>	42	19	<b>SL662B-8SH</b>	42	19	<b>SL662B-8DS</b>	42	19
	10	254	10	254	5/8	16	1	25.4	9900	4500	<b>SL662B-100S</b>	71	27.2	<b>SL662B-10SH</b>	60	27.2	<b>SL662B-10DS</b>	60	27.2
	12	304	12	304	3/4	19	1-1/4	32	13,200	6000	<b>SL662B-120S</b>	94	42.7	<b>SL662B-12SH</b>	94	42.7	<b>SL662B-12DS</b>	94	42.7
<b>TRIPLE SHEAVE BLOCK</b>	4	102	4	102	3/8	10	1-1/2	38	4400	2000	<b>SL663B-40S</b>	15	6.8	<b>SL663B-4SH</b>	15	6.8	<b>SL663B-4DS</b>	15	6.8
	6	152	6	152	3/8	10	5/8	16	6600	3000	<b>SL663B-60S</b>	28	12.7	<b>SL663B-6SH</b>	28	12.7	<b>SL663B-6DS</b>	28	12.7
	8	203	8	203	1/2	12.7	3/4	19	8800	4000	<b>SL663B-80S</b>	51	23.2	<b>SL663B-8SH</b>	51	23.2	<b>SL663B-8DS</b>	51	23.2
	10	254	10	254	5/8	16	1	25.4	13,200	6000	<b>SL663B-100S</b>	80	36.4	<b>SL663B-10SH</b>	80	36.4	<b>SL663B-10DS</b>	80	36.4
	12	304	12	304	3/4	19	1-1/4	32	15,400	7000	<b>SL663B-120S</b>	115	52.3	<b>SL663B-12SH</b>	115	52.3	<b>SL663B-12DS</b>	115	52.3

DO NOT EXCEED WORKING LOAD LIMITS

FACTORY CERTIFICATE OF CONFORMANCE INCLUDED WITH EACH BLOCK

**Associated Wire Rope & Rigging, Inc.**  
 8125 Saran Avenue  
 Playa del Rey, CA 90293  
 Tel: 310-448-5444 or 800-901-1135  
 Fax: 310-448-5446  
 sales@awrrinc.com

*\*DIAMOND PATTERN ALSO AVAILABLE (700 Series)*



AVAILABLE TO MEET U.S. FEDERAL SPECIFICATIONS

**Waterman Supply Co., Inc.**  
 P.O. Box 596  
 Wilmington, CA 90748-3131  
 Tel: 310-522-9698 or 800-322-3131  
 Fax: 310-522-1043  
 sales@watermansupply.com