




Tonsberg Type Mooring Link

Galvanized steel mooring link of compact design typically utilized as connection between wire rope and fiber forerunner.

Sizes:
90, 120, 180 & 300 M/Tons.

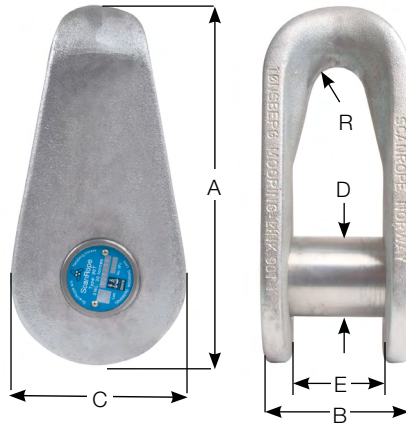

Note: Fiber Rope in the bolt.
Wire Rope around the body.


MODEL	90T	120T	180T
Forerunner Circ. (inches)	7 - 9	9 - 11	11 - 15
A (mm)	285	324	350
B (mm)	115	142	184
C (mm)	136	150	160
D (mm)	65	75	85
E (mm)	75	90	120
R (mm)	22	28	30
Breaking Load M/Tons	90	120	180
Proof Load M/Tons	55	70	95
Safe Working Load M/Tons	30	40	60
Weight	11,2 kg (25 lbs.)	16,9 kg (37 lbs.)	25 kg (55 lbs.)



Mandal Type Fairlead Shackle

Stainless steel mooring shackle with sleek shape designed to pass through fairleads.

Sizes:
90, 120 & 300 M/Tons.

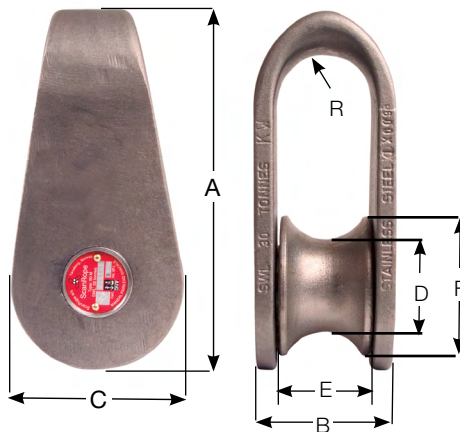

Note: Wire Rope in the sheave.
Fiber Rope around the body.

MODEL	90 M	120 M
Forerunner Circ. inches	6 - 9	9 - 11
A (mm)	255	310
B (mm)	97	121
C (mm)	120	130
D (mm)	65	82
E (mm)	67	90
F (mm)	100	128
R (mm)	34	45
Breaking Load M/Tons	90	120
Proof Load M/Tons	55	70
Safe Working Load M/Tons	30	40
Weight	7,8 kg (17.2 lbs.)	13,3 kg (29 lbs.)