




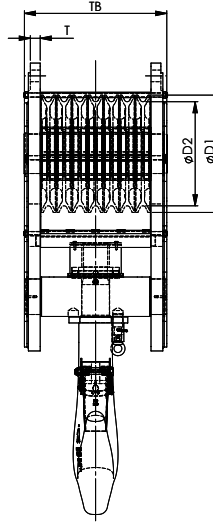

BLOCKS

FAST REEVE CRANE BLOCKS

7 SHEAVES

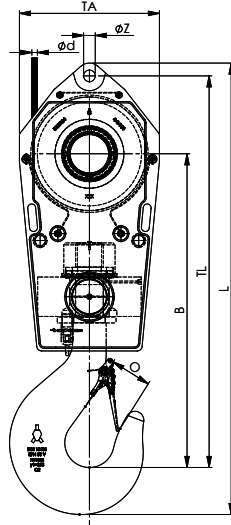

- DOUBLE HOOK
- DOUBLE HOOK WITH SHACKLE HOLE
- QUAD HOOK
- SHACKLE STUD EYE

MODEL NO.	WLL (UST)	FOR WIRE ØD INCH	DIMENSIONS (INCH)										WEIGHT (LBS)
			ØD1	ØD2	B	O	TA	TB	TL	L	T	ØZ	
FRB 355.xx.7.75.E	82.5	9/16 - 7/8	16.1	14.0	1005.0	4.4	500.0	557.0	1275.0	1454.0	TBD	TBD	1600
FRB 355.xx.7.100.E	110	9/16 - 7/8	16.1	14.0	1108	5.5	500.0	637.0	1378	1574.0	TBD	TBD	2000
FRB 400.xx.7.100.E	110	9/16 - 7/8	18.1	15.7	1107.0	5.5	570.0	636.0	1412.5	1610.0	TBD	TBD	2400
FRB 450.xx.7.125.E	137.5	3/4 - 11/8	23.5	20.8	1313.0	6.3	600.0	577.0	1668.0	1858.0	TBD	TBD	3520
FRB 450.xx.7.137.E	150	3/4 - 11/8	20.3	17.7	1378.0	6.3	600.0	642.0	1712.9	1955.0	TBD	TBD	3100
FRB 450.xx.7.160.E	176	3/4 - 11/8	23.5	20.8	1416.0	7.1	600.0	682.0	1771.0	1983.0	TBD	TBD	4000
FRB 528.xx.7.160.E	176	7/8 - 11/4	23.5	20.8	1581.0	7.1	710.0	682.0	2017.0	2229.0	TBD	TBD	4620
FRB 528.xx.7.182.E	200	7/8 - 11/4	23.5	20.8	1591.0	7.9	710.0	722.0	2051.0	2287.0	TBD	TBD	5500
FRB 528.xx.7.200.E	220	7/8 - 11/4	23.5	20.8	1591.0	7.9	710.0	722.0	2051.0	2287.0	TBD	TBD	5500
FRB 575.xx.7.209.E	230	15/16 - 11/4	25.6	22.6	1661.0	7.9	770.0	782.0	2066.0	2354.0	TBD	TBD	6500
FRB 575.xx.7.228.E	250	15/16 - 11/4	25.6	22.6	1837.0	8.8	770.0	682.0	2257.0	2522.0	TBD	TBD	6500
FRB 670.xx.7.209.E	230	1 - 11/2	29.9	26.4	1602.0	7.9	870.0	742.0	2087.0	2364.0	TBD	TBD	6500
FRB 670.xx.7.228.E	250	1 - 11/2	29.9	26.4	1602.0	7.9	870.0	720.0	2087.0	2364.0	TBD	TBD	6500
FRB 670.xx.7.250.DB	275	1 - 11/2	29.9	26.4	1852.0	7.1	870.0	942.0	2127.0	2527.0	TBD	TBD	10760
FRB 670.xx.7.272.E	300	1 - 11/2	29.9	26.4	1852.0	8.8	870.0	1032.0	2342.0	2607.0	TBD	TBD	10760

NOTE xx = To be replaced by metric wire size in final part number • TBD = These dimensions vary with wire size

- The dimensions in this table are indicative only. A drawing will always be submitted prior to production and will be the leading document when discussing dimensions.
- Blocks shown here are standard models; inquiries for custom versions are welcome.
- Refer to wire rope manufacturers D/d ratio guideline.
- Hook locking pin included on all blocks 40M ton and higher

Minimum Ultimate Strength = 4 x WLL.



P. O. Box 596 (90748) • 910 Mahar Ave., Wilmington, CA 90744
 (800) 322-3131 • (310) 522-9698 • Fax: (310) 522-1043
 E-Mail: sales@watermansupply.com
 www.watermansupply.com
 TradeNet ID 61935