




SOCKETS

SHORT BOW SOCKETS QUENCHED AND TEMPERED CAST STEEL

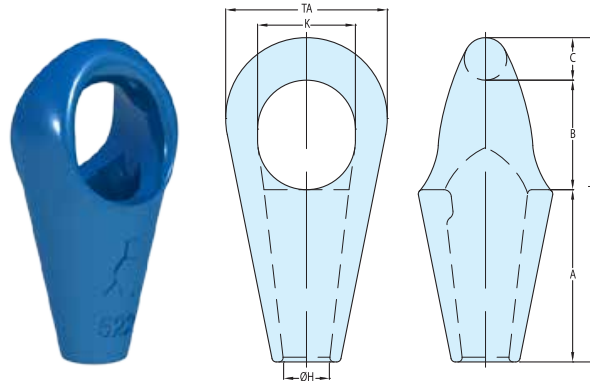


MODEL NR.	MBL (USTONS)	FOR WIRE Ø		DIMENSIONS (INCH)							WEIGHT (LBS)
		MM	INCH	A	B	C	Ø H	K	TA	TL	
SBS 512	154	31-36	1 1/4 - 1 3/8	5 9/16	3 1/4	1 1/2	1 1/2	2 15/16	5 3/16	10 5/16	15
SBS 517	176	37-42	1 1/2 - 1 5/8	6 3/8	4 1/16	1 1/2	1 3/4	3 5/8	6	12	22
SBS 519	220	43-48	1 3/4 - 1 7/8	7 3/8	4 3/4	1 7/8	2	4 7/16	7	14	34
SBS 522	276	49-54	2 - 2 1/8	8 1/16	5 3/16	2 1/8	2 1/4	4 3/4	7 7/8	15 3/8	46
SBS 524	353	55-60	2 1/4 - 2 3/8	9 1/16	5 13/16	2 7/16	2 1/2	5 5/16	8 11/16	17 5/16	62
SBS 526	441	61-68	2 1/2 - 2 5/8	10 1/2	6 1/2	2 11/16	2 15/16	5 7/8	9 13/16	19 5/8	96
SBS 527	551	69-75	2 3/4 - 2 7/8	11 5/16	7	2 15/16	3 1/8	6 7/16	10 13/16	21 1/4	118
SBS 528	661	76-80	3 - 3 1/8	12 3/8	7 11/16	3	3 1/2	6 7/8	11 5/8	23 1/16	155
SBS 529	772	81-86	3 1/4 - 3 3/8	12 7/8	8 1/2	3 1/4	3 5/8	7 5/8	12 5/8	24 5/8	179
SBS 530	882	87-93	3 1/2 - 3 5/8	14 1/8	8 11/16	3 5/8	3 7/8	7 15/16	13 3/4	26 3/8	246
SBS 531	992	94-102	3 3/4 - 4	14 3/8	9 1/4	3 15/16	4 1/4	8 7/16	14 3/4	27 9/16	287
SBS 533	1102	108-115	4 1/4 - 4 1/2	16 9/16	10 5/8	4 5/16	4 3/4	9 7/16	16 1/8	31 1/2	401

MBL = Minimum Breaking Load

The standard finish of our sockets is blue. Hot dipped galvanized is also available.

All sockets are provided with an EN 10204-2.1 declaration of conformity, EN 10204-3.1 material certificate and can be provided with a 2006/42/EC declaration where applicable.



P. O. Box 596 (90748) • 910 Mahar Ave., Wilmington, CA 90744

(800) 322-3131 • (310) 522-9698 • Fax: (310) 522-1043

E-Mail: sales@watermansupply.com

www.watermansupply.com

TradeNet ID 61935