


DATREX, INC. - PHOTOLUMINESCENT TAPES, RING BUOYS AND LIFEBOUY LIGHTS

FLEXIBLE PHOTOLUMINESCENT TAPES

for Low-Location Lighting (LLL) Escape Routing Systems

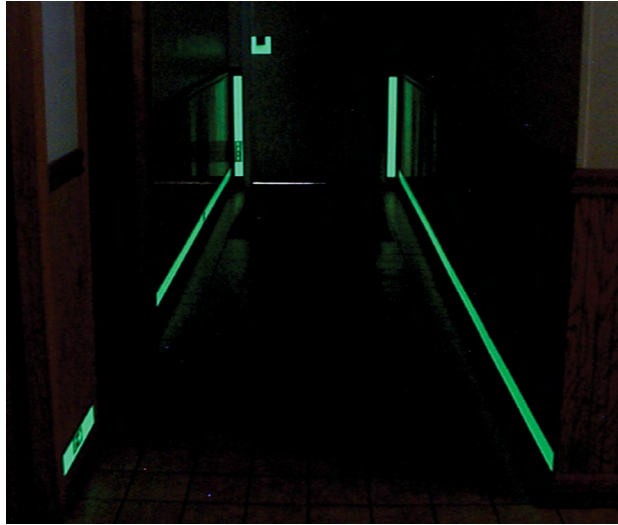


• Meets IMO Resolution A752 (18) • Type Approval Lloyd's Register

Flexible laminated film coated with permanent acrylic pressure-sensitive adhesive and backed with poly-coated release liner. Product withstands UV light and does not show significant degradation when used outdoors.

STANDARD GRADE PHOTO-LUMINESCENT TAPES



5670HT-02-SG-G



5670HT-03-SF-G / 6050-BS-CV-G

Blank	2" x 150'	5670HT-02-SF-G
Blank	2" x 30'	5670HT-0230-SF-G
Arrow	2" x 150'	5670HT-02-SF-G / 6050-BI-CV-G
Arrow	2" x 30'	5670HT-0230-SF-G / 6050-BI-CV-G
Blank	3" x 150'	5670HT-03-SF-G
Blank	3" x 30'	5670HT-0330-SF-G
Arrow	3" x 150'	5670HT-03-SF-G / 6050-BS-CV-G
Arrow	3" x 30'	5670HT-0330-SF-G / 6050-BS-CV-G

Arrows on arrow tape are one every 3'.

To order SUPER GRADE tape, change 5670 to 5680 in the order number.

PERFORMANCE		
Material	5670	5680
Afterglow Luminance		
After 10 minutes	134.4 mcd/m ²	206.5 mcd/m ²
After 60 minutes	18.1 mcd/m ²	28.9 mcd/m ²
Decay time to 0.3 mcd/m ²	1481 minutes (24.68 hrs)	1957 minutes (32.62 hrs)

RING BUOYS

Deck Buoy Model

#DX0325D


- 30" diameter
- 2.5 kg orange buoy with retroreflective tape
- Drop tested up to 50 meters
- U.S.C.G. Approvals #160.050/127/0, #160.150/2/0
- Meets SOLAS 1998 requirements
- UL SOLAS/MED



Bridge Buoy Model

#DX0340D

- 30" diameter
- 4.0 kg orange lifering buoy with retroreflective tape
- Intended to operate the quick-release arrangement provided for self-activating smoke signals and self-igniting lights
- Drop tested up to 50 meters
- U.S.C.G. Approvals #160.050/128/0, #160.150/5/0
- Meets SOLAS 74/83 requirements
- UL SOLAS/MED



DA0163E Intrinsically Safe Lifebuoy Light

- Activation: automatic via pull cord
- Orange with black bracket
- Light output: >2 candela
- Light duration: >15 hours
- Storage life: 5 years
- Drop height: up to 76 meters
- Weight: 320 grams
- Intrinsically safe (category 1) and, as such, suitable for use in hazardous zones 0, 1 and 2
- U.S.C.G. Approved
- Holds ATEX, IECEx and ETL listing under UL 913
- Approved according to SOLAS/MED



Datrex also offers a complete assortment of rigid strips as LLL.

Photoluminescent Signs & Evacuation Routing Tapes



Main Office: P.O. Box 1537, Kinder, LA 70648
 Tel: (337) 738-4511 • Toll Free: (800) 828-1131
 www.datrex.com • datrex@datrex.com

Branch Offices:

Miami, FL • (305) 638-8220 • datrexmia@datrex.com
Jacksonville, FL • (904) 355-1401 • datrexjax@datrex.com
Seattle, WA • (206) 762-9070 • datrexsea@datrex.com
New Castle, DE • (717) 435-8011 • datrexne@datrex.com
 TradeNet ID is 65511