

PHOENIX LIGHTING

VAPORPROOF FIXTURE – Vaporproof Series

VP-W – Vaporproof Wall Mount Fixture



Vaporproof fixtures UL rated for hazardous and wet locations. Durable design with marine grade components and vaporproof seal against outside elements. Maximum versatility with multiple mounting capabilities, lamp options and accessories. For use in food processing areas, stairwells, elevator pits and other demanding applications

Certifications:

UL Listed to:

- UL 1598 Suitable for Wet Locations (all mounting types)
- UL 1598A Marine Outside Type (Saltwater) (reflector models not included)
- UL 844 Class I, Division 2 Group A, B, C, D (with clear heat treated glass globe) (reflector model not included) Class 1, Zone 2 Group A, B, B+H2, C

ABS

Dimensions:

Incandescent

Height: 11.10" (282mm)

Depth: 7.40" (188mm)

26W Compact Fluorescent


Height: 12.50" (318mm)

Depth: 7.40" (188mm)

With Polycarbonate Reflector

Height: 12.50" (318mm)

Depth: 14.00" (356mm)

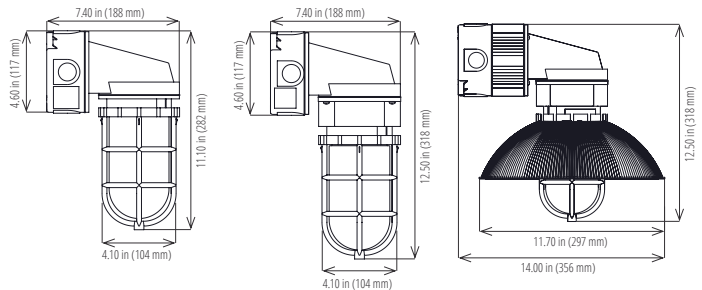

Options and Accessories:

INC ²	Incandescent (75W maximum)
26CFL ³	26W CFL (triple tube; 4-pin base)
120	120V, 60Hz
277	277V, 60Hz
FUSE FLRST	Fuse Kit Fluorescent; 1 amp, 300V fuse
GHC	Clear Heat Treated Glass (75W Maximum)
GPC	Clear Prismatic Glass (75W Maximum, for hazardous locations)
GCR	Guard with Clear Reflector

Construction	Engineering grade, nonmetallic thermoplastic construction Silicone gaskets
Finish	Gray finish on housing and guard
Hardware	External screws and inserts are corrosion resistant
Globes	Clear heat treated glass - standard Prismatic glass accessory
Guard	Guard is standard on fixture Thermoplastic polymer
Reflector	Clear, impact-resistant, prismatic polycarbonate reflector accessory
Grounding	Integral metal grounding frame delivers "hub-to-hub" grounding continuity
Light source	INC - A19 medium base, 75W maximum CFL - GX24q base, 26W Lamps not included
Power source	Integral ballast on fluorescent units
Ambient operating temperature	26W CFL: -23°C to +35°C INC: contact factory
Mounting	Units have four 3/4 inch threaded hubs with liquid tight knockouts Not approved for base down orientation For ceiling mounting, use without wall mount component
Warranty	1 year

Meets the requirements of the Buy American Act (BAA) and/or the American Recovery and Reinvestment Act (ARRA)

Notes

- 1 Not approved for base down orientation. For ceiling mounting, use without wall mount component.
- 2 Screw-in, self-ballasted CFL or LED lamps are not for use in incandescent fixtures
- 3 Electronic ballast standard

Special Projects: We may be able to accommodate your special projects, so please don't hesitate to ask about additional options. Minimum order quantities and/or extended lead times will apply. Contact your Phoenix representative with specific inquiries.