


LIFE SAVING EQUIPMENT

Life Rafts

Crewsaver, Elliot & RFD

Models available
to accommodate
4 to 25 persons.



Billy Pugh

Personnel Transfer Device

4-Person capacity.
Pull tested and certified
for up to 1200 lbs.
Model No. X-904



Collapsible Cargo Baskets

- Polypropylene rope construction
- Canvas on sides of basket
- Floor of steel pipe frame
- Pick up cable 5/8" galvanized
- Flexible sides and protective fenders

Overall height – 10'
(Pickup ring to bottom of basket)
Width – 6'
Side extension – up to 3'
Collapsed height – 1'
Weight – 300 lbs.
Safe working load – 3500 lbs.



Model X-8CB

Can be fitted with stabilizer at
additional cost.

Pains Wessex

Manoverboard MK8

15-minute light & smoke
lifebuoy marker with wa-
ter-activated
lighting system.
Model No. 53775



Pains Wessex

Linethrower 250

A self-contained line-throwing
appliance consisting of a
plastic case with an end cap
and 250m of line, an integral
striker mechanism plus a rocket.
Fired by a twist grip and used for passing a
4mm dia. line from ship to ship and ship to
shore or for rescuing a swimmer in distress.
Model No. 50200



Ocean Signal

SafeSea E100 EPIRB

Developed to meet the needs of all commercial,
fishing and leisure vessels.

- Extreme battery life even at low temperatures
- In excess of 96 hours operation
- User replaceable batteries with five year replacement interval
- Intuitive operating controls protected from accidental activation
- Meets or exceeds all International standards
- Class 2 EPIRB (-20°C - +55°C) for general use
- Non hazardous battery




ACR Satellite₃ 406™

Cat I 406 MHz EPIRB
Optional GPS interface cable
(sold separately, P/N 9388.1)
Meets GMDSS, RTCM and
IMO standards
Model No. 2874



Personnel Transfer Nets

- API specification 2C Third Edition, March 1983, Section 5.4 (d). S.W.L. R2500LGS with design factor of 10.
- Lifting ring – 7/8" forged steel
- Hand spliced eyes (no swedges)
- Safety load line (optional: add "DC" to model number)
- Stabilizer unit covered with plastic-impregnated fabric
- Netting lines 3/4", 9950 lbs. test each
- Top ring 30" padded
- Bottom ring overall dimensions 72" with padding
- Padding is shock absorbing, synthetic flotation material
- Buoyancy is enough to float (5) five men
- 9 feet from bottom to top ring
- Four entrances to net
- Bottom of net – 5 rubber chaf pads

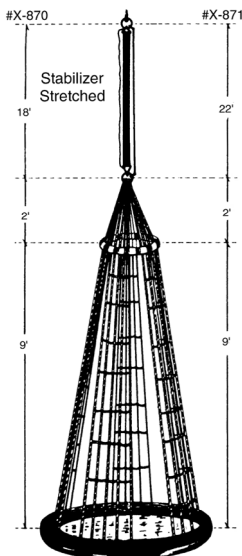

X-870 – Overall vertical length 29 feet
X-871 – Rough seas net same as X-870
but designed to operate in rougher seas.
Stabilizer & load line extended.

X-871A – Air cushion net made for rough
seas but minimizes shock by using a
cushion of air.

X-871-8 – Largest personnel net; enough
room and flotation for 8 riders.

X-816 – For platforms with short boom
cranes. Overall height 25 feet.

X-840 – Overall height 27 feet. Bottom ring
60" O.D. with padding.

To add 1/2" safety load line simply add
"D/C" (Double Cable) to model number
(Examples: X-870 D/C, X-871A D/C)



RELIABLE | SAFETY | PRODUCTS

TradeNet ID 71412

Alexander/Ryan Marine & Safety

2000 Wayside Drive • Houston, TX 77011 USA

Tel: +1 713 923 1671 • Toll Free: 1 800 923 1672

www.alexanderryan.com

SalesNola@alexanderryan.com