

Three-Phased Asynchronous Motors

2026



Our Business

Incorporate in 2003, **Aflex Ships Equipment** provides marine pump solutions to international maritime sector. Aflex honors to deliver values to our customers through a global network of diversified professionals. Having an in-house inventory for stocking pumps and spare parts, as well as a test bay for all pump testing and certifications we are able to assure our customers in service optimization and efficiency.

Aflex Singapore, a member of ASMI, Association of Singapore Marine Industries practices extensive cross border networking in exchanging professional and credible talents to develop a vision of globalization withholding a vision of being resourceful and innovation in our solutions.

Ensuring excellence in our portfolio, we are compliant to ISO 9001:2015 and certified Bizsafe level 3 status to effectively meet stringent safety and health management systems.

In addition, our overseas branch offices in Shanghai and Dubai would be of reach to you as overseas support.

Our Vision and Values

Our vision is to be our customers' preferred partner for marine pumps and ship equipment globally.

Our *Modus Operandi* is treaded with our values. **Agility**, to be quick responding to our customers as we value all opportunities to make them our acquaintances. Our precise just-in-time policy in inventory management enables us to meet timely deliveries to our customers. Valuing the need to **Focus and Listen** to our customers, we are a company who empathizes with our customer's needs and problems. Resolving, recesses in operations of our customers. Striving for **EXcellence** in quality, we invest in continuous research and innovative improvement processes to provide the best sought solutions with grace to our customers. A condensation of our values towards a revolutionary branding, **AFLEX**.


Our Certifications



Specifications and Features




Type of electric motor	Totally enclosed fan cooling (TEFC) squirrel cage induction motor
Design standard	IEC 60034, IEC 60072
Voltage and frequency	<1000V / 50Hz, 60Hz
Time duty	Continuous S1 duty
Insulation class	Class F Insulation, Class B temperature rise
Protection degree	IP55, IP56, IP65
Service factor	1
Ambient temperature	-15°C~+40°C
Relative humidity	≤90%
Altitude	≤1000m
Material	Cast iron

Connections



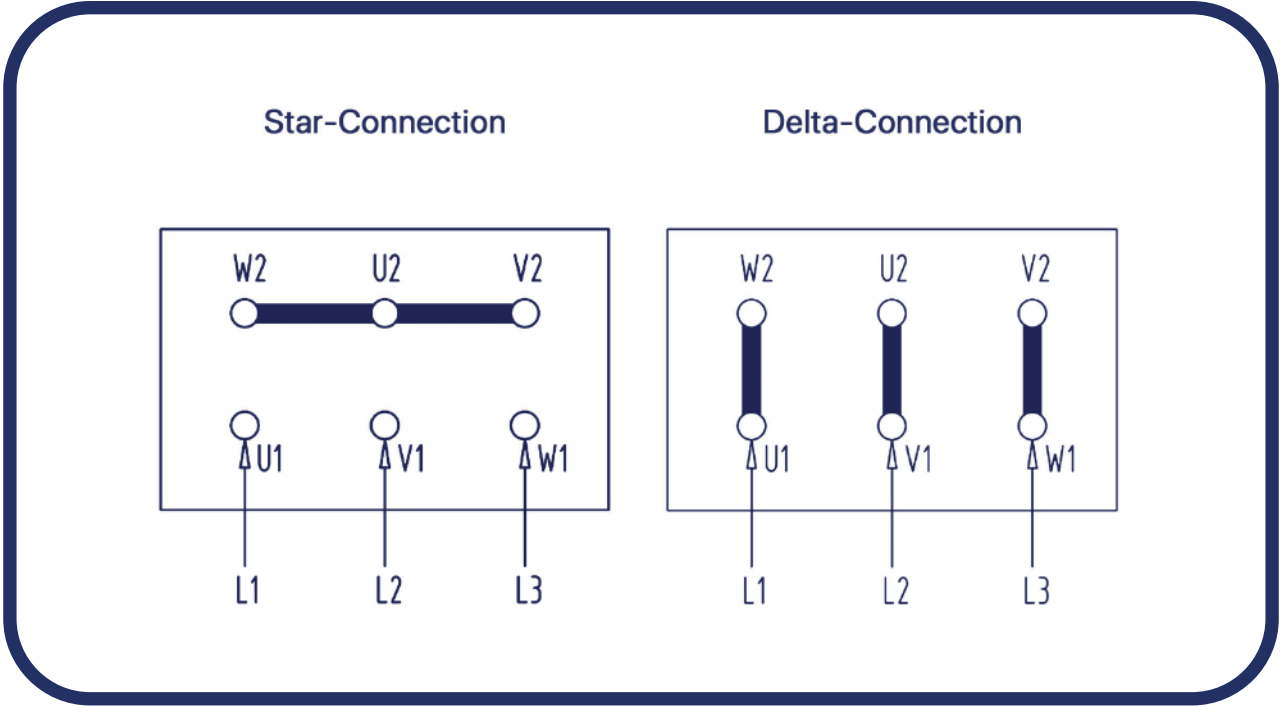


B3 Mounting Direction




71-132

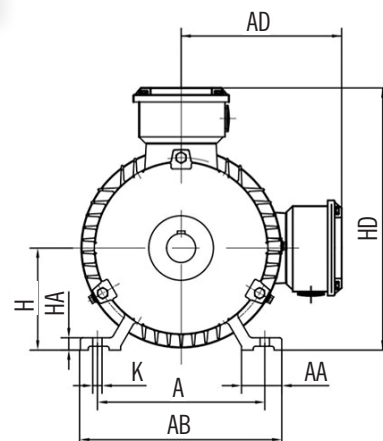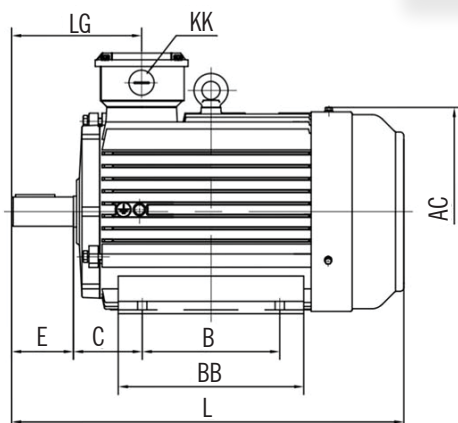

160-200

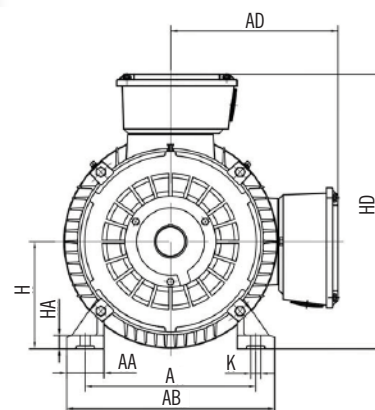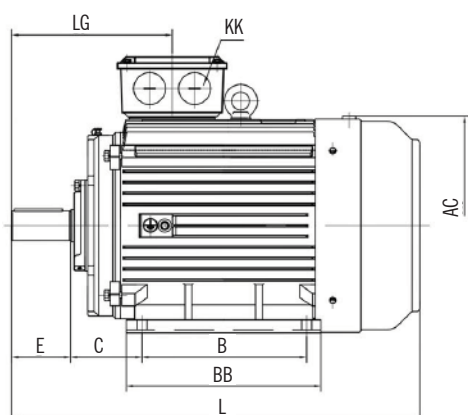

225-355

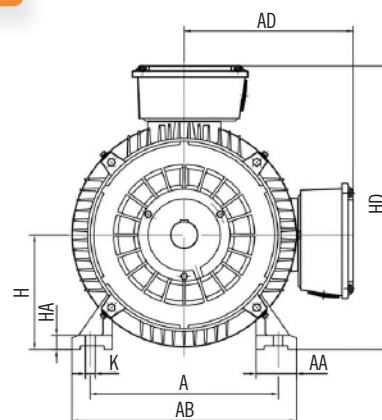

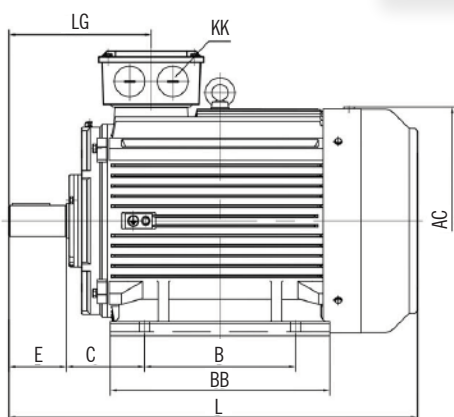


B3 Dimension Table




Frame Size	A	AA	AB	AC	AD	B	BB	C	D	E	F	G	GD	H	HA	HD	K	KK	L	LG
71	112	32	144	136	144	90	120	45	14	30	5	11	5	71	8	215	7	1-M25X1.5	255	99
80	125	34	160	175	150	100	130	50	19	40	6	16	6	80	10	230	10	1-M25X1.5	295	112
90S	140	36	180	190	170	100	135	56	24	50	8	20	7	90	13	260	10	1-M25X1.5	320	126
90L	140	36	180	190	170	125	160	56	24	50	8	20	7	90	13	260	10	1-M25X1.5	345	126
100L	160	40	200	215	180	140	176	63	28	60	8	24	7	100	14	280	12	1-M25X1.5	385	139
112M	190	45	230	236	198	140	180	70	28	60	8	24	7	112	14	310	12	2-M32X1.5	410	144
132S	216	53	265	275	223	140	200	89	38	80	10	33	8	132	16	355	12	2-M32X1.5	485	167
132M	216	53	265	275	223	178	238	89	38	80	10	33	8	132	16	355	12	2-M32X1.5	525	167
160M	254	65	320	330	265	210	258	108	42	110	12	37	8	160	19	430	15	2-M40X1.5	610	260
160L	254	65	320	330	265	254	302	108	42	110	12	37	8	160	19	430	15	2-M40X1.5	655	260
180M	279	70	350	380	285	241	282	121	48	110	14	43	9	180	22	465	15	2-M40X1.5	680	277
180L	279	70	350	380	285	279	320	121	48	110	14	43	9	180	22	465	15	2-M40X1.5	720	277
200L	318	80	390	420	310	305	355	133	55	110	16	49	10	200	25	510	19	2-M50X1.5	770	298
225S (4-8P)	356	75	435	465	335	286	350	149	60	140	18	53	11	225	28	560	19	2-M50X1.5	825	338
225M (2P)	356	75	435	465	335	311	375	149	55	110	16	49	10	225	28	560	19	2-M50X1.5	820	308
225M (4-8P)	356	75	435	465	335	311	375	149	60	140	18	53	11	225	28	560	19	2-M50X1.5	850	338
250M (2P)	406	100	485	520	385	349	445	168	60	140	18	53	11	250	33	635	24	2-M63X1.5	925	357
250M (4-8P)	406	100	485	520	385	349	445	168	65	140	18	58	11	250	33	635	24	2-M63X1.5	925	357
280S (2P)	457	105	550	570	415	368	490	190	65	140	18	58	11	280	35	695	24	2-M63X1.5	970	357
280S (4-8P)	457	105	550	570	415	368	490	190	75	140	20	68	12	280	35	695	24	2-M63X1.5	990	357
280M (2P)	457	105	550	570	415	419	540	190	65	140	18	58	11	280	35	695	24	2-M63X1.5	1025	357
280M (4-8P)	457	105	550	570	415	419	540	190	75	140	20	68	12	280	35	695	24	2-M63X1.5	1045	357
315S (2P)	508	125	630	650	500	406	515	216	65	140	18	58	11	315	45	815	28	2-M63X1.5	1160	391
315M (2P)	508	125	630	650	500	457	625	216	65	140	18	58	11	315	45	815	28	2-M63X1.5	1270	391
315L (2P)	508	125	630	650	500	508	625	216	65	140	18	58	11	315	45	815	28	2-M63X1.5	1270	391
315S (4-8P)	508	125	630	650	500	406	515	216	80	170	22	71	14	315	45	815	28	2-M63X1.5	1190	421
315M (4-8P)	508	125	630	650	500	457	625	216	80	170	22	71	14	315	45	815	28	2-M63X1.5	1300	421
315L (4-8P)	508	125	630	650	500	508	625	216	80	170	22	71	14	315	45	815	28	2-M63X1.5	1300	421
355M (2P)	610	115	725	735	645	560	750	254	75	140	20	68	12	355	52	1000	28	2-M63X1.5	1600	420
355L (2P)	610	115	725	735	645	630	750	254	75	140	20	68	12	355	52	1000	28	2-M63X1.5	1600	420
355M (4-8P)	610	115	725	735	645	560	750	254	95	170	25	86	14	355	52	1000	28	2-M63X1.5	1630	450
355L (4-8P)	610	115	725	735	645	630	750	254	95	170	25	86	14	355	52	1000	28	2-M63X1.5	1630	450

B5 Mounting Direction




71-132

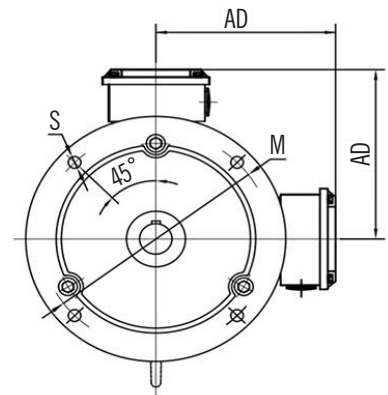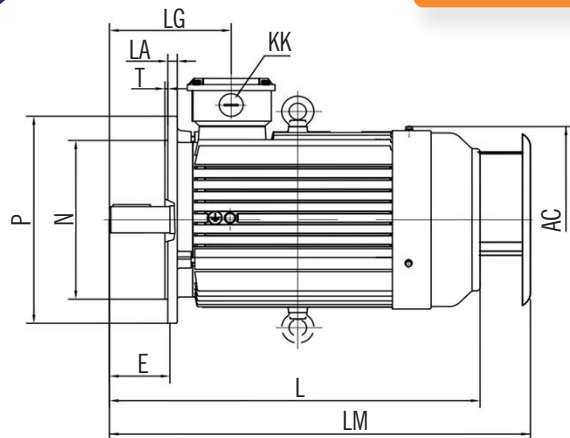

160-200

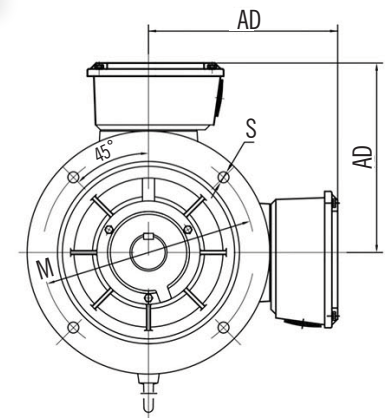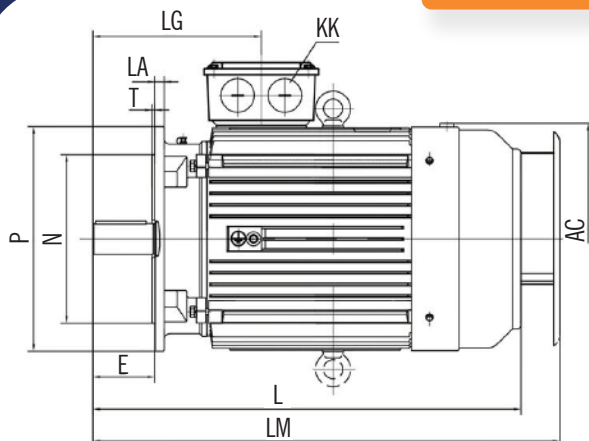

225-355

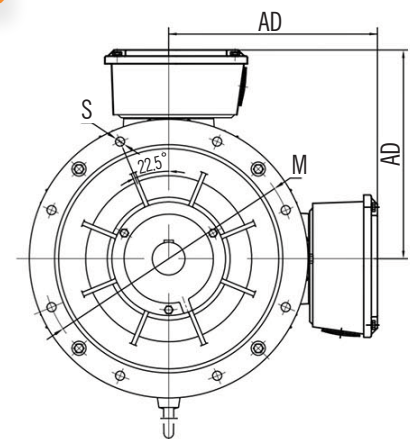

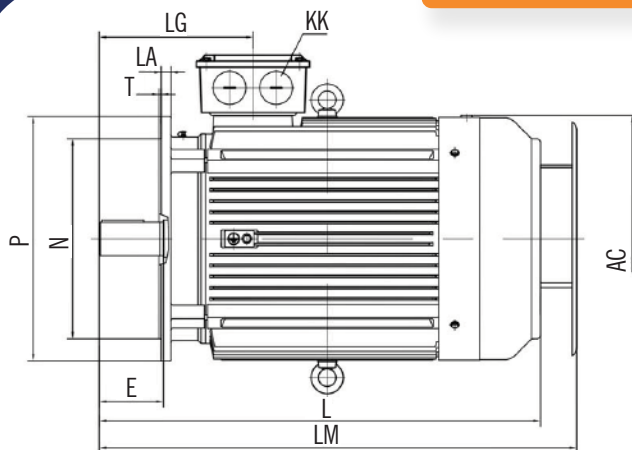


B5 Dimension Table




Frame Size	AC	AD	D	E	F	G	GD	KK	L	LA	LG	LM	M	N	P	S	T
71	136	144	14	30	5	11	5	1-M25X1.5	255	14	99	/	130	110	160	10	3.5
80	175	150	19	40	6	15.5	6	1-M25X1.5	295	14	112	330	165	130	200	12	3.5
90S	190	170	24	50	8	20	7	1-M25X1.5	320	12	126	360	165	130	200	12	3.5
90L	190	170	24	50	8	20	7	1-M25X1.5	345	12	126	385	165	130	200	12	3.5
100L	215	180	28	60	8	24	7	1-M25X1.5	385	14	139	425	215	180	250	15	4
112M	236	198	28	60	8	24	7	2-M32X1.5	410	14	144	460	215	180	250	15	4
132S	275	223	38	80	10	33	8	2-M32X1.5	485	14	167	535	265	230	300	15	4
132M	275	223	38	80	10	33	8	2-M32X1.5	525	14	167	575	265	230	300	15	4
160M	330	265	42	110	12	37	8	2-M40X1.5	610	15	260	660	300	250	350	19	5
160L	330	265	42	110	12	37	8	2-M40X1.5	655	15	260	705	300	250	350	19	5
180M	380	285	48	110	14	42.5	9	2-M40X1.5	680	15	277	750	300	250	350	19	5
180L	380	285	48	110	14	42.5	9	2-M40X1.5	720	15	277	790	300	250	350	19	5
200L	420	310	55	110	16	49	10	2-M50X1.5	770	17	298	840	350	300	400	19	5
225S (4-8P)	465	335	60	140	18	53	11	2-M50X1.5	825	19	338	895	400	350	450	19	5
225M (2P)	465	335	55	110	16	49	10	2-M50X1.5	820	19	308	890	400	350	450	19	5
225M (4-8P)	465	335	60	140	18	53	11	2-M50X1.5	850	19	338	920	400	350	450	19	5
250M (2P)	520	385	60	140	18	53	11	2-M63X1.5	925	20	357	1005	500	450	550	19	5
250M (4-8P)	520	385	65	140	18	58	11	2-M63X1.5	925	20	357	1005	500	450	550	19	5
280S (2P)	570	415	65	140	18	58	11	2-M63X1.5	970	22	357	1050	500	450	550	19	5
280S (4-8P)	570	415	75	140	20	67.5	12	2-M63X1.5	990	22	357	1070	500	450	550	19	5
280M (2P)	570	415	65	140	18	58	11	2-M63X1.5	1025	22	357	1105	500	450	550	19	5
280M (4-8P)	570	415	75	140	20	67.5	12	2-M63X1.5	1045	22	357	1125	500	450	550	19	5
315S (2P)	650	500	65	140	18	58	11	2-M63X1.5	1160	24	391	1250	600	550	660	24	6
315M (2P)	650	500	65	140	18	58	11	2-M63X1.5	1270	24	391	1360	600	550	660	24	6
315L (2P)	650	500	65	140	18	58	11	2-M63X1.5	1270	24	391	1360	600	550	660	24	6
315S (4-8P)	650	500	80	170	22	71	14	2-M63X1.5	1190	24	421	1280	600	550	660	24	6
315M (4-8P)	650	500	80	170	22	71	14	2-M63X1.5	1300	24	421	1390	600	550	660	24	6
315L (4-8P)	650	500	80	170	22	71	14	2-M63X1.5	1300	24	421	1390	600	550	660	24	6
355M (2P)	735	645	75	140	20	67.5	12	2-M63X1.5	1600	25	420	1690	740	680	800	24	6
355L (2P)	735	645	75	140	20	67.5	12	2-M63X1.5	1600	25	420	1690	740	680	800	24	6
355M (4-8P)	735	645	95	170	25	86	14	2-M63X1.5	1630	25	450	1720	740	680	800	24	6
355L (4-8P)	735	645	95	170	25	86	14	2-M63X1.5	1630	25	450	1720	740	680	800	24	6

B35 Mounting Direction




71-132

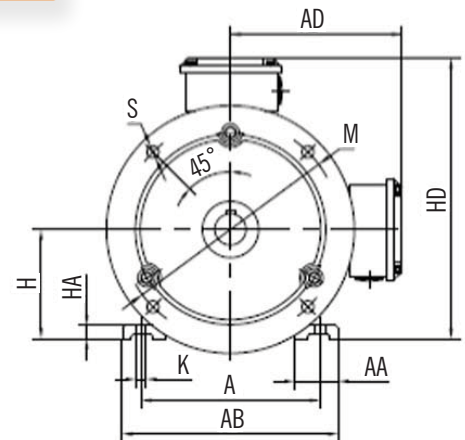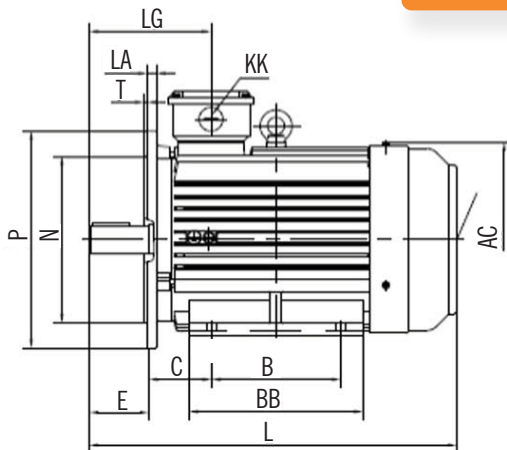

160-200

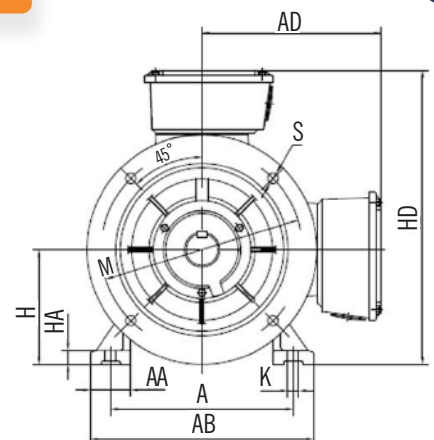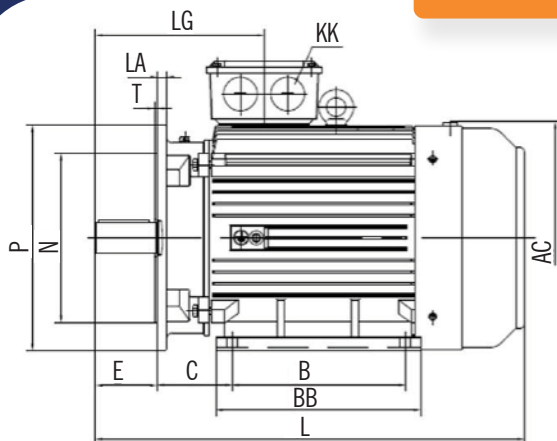

225-355

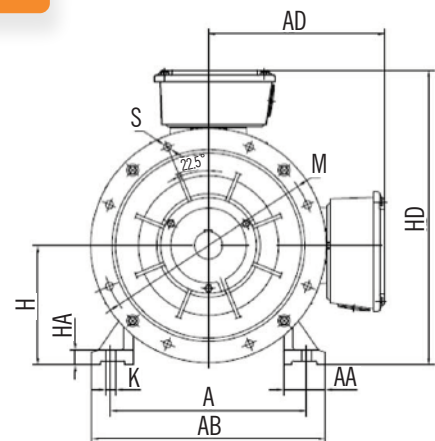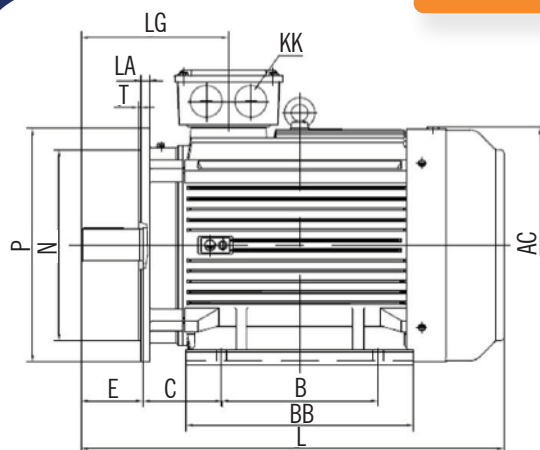

B35 Dimension Table

Frame Size	A	AA	AB	AC	AD	B	BB	C	D	E	F	G	GD	H	HA	HD	K	KK	L	LA	LG	M	N	P	S	T
71	112	32	144	136	144	90	120	45	14	30	5	11	5	71	8	215	7	1-M25X1.5	255	12	99	130	110	160	10	4
80	125	34	160	175	150	100	130	50	19	40	6	16	6	80	10	230	10	1-M25X1.5	295	14	112	165	130	200	12	4
90S	140	36	180	190	170	100	135	56	24	50	8	20	7	90	13	260	10	1-M25X1.5	320	12	126	165	130	200	12	4
90L	140	36	180	190	170	125	160	56	24	50	8	20	7	90	13	260	10	1-M25X1.5	345	12	126	165	130	200	12	4
100L	160	40	200	215	180	140	176	63	28	60	8	24	7	100	14	280	12	1-M25X1.5	385	14	139	215	180	250	15	4
112M	190	45	230	236	198	140	180	70	28	60	8	24	7	112	14	310	12	2-M32X1.5	410	14	144	215	180	250	15	4
132S	216	53	265	275	223	140	200	89	38	80	10	33	8	132	16	355	12	2-M32X1.5	485	14	167	265	230	300	15	4
132M	216	53	265	275	223	178	238	89	38	80	10	33	8	132	16	355	12	2-M32X1.5	525	14	167	265	230	300	15	4
160M	254	65	320	330	265	210	258	108	42	110	12	37	8	160	19	430	15	2-M40X1.5	610	15	260	300	250	350	19	5
160L	254	65	320	330	265	254	302	108	42	110	12	37	8	160	19	430	15	2-M40X1.5	655	15	260	300	250	350	19	5
180M	279	70	350	380	285	241	282	121	48	110	14	43	9	180	22	465	15	2-M40X1.5	680	15	277	300	250	350	19	5
180L	279	70	350	380	285	279	320	121	48	110	14	43	9	180	22	465	15	2-M40X1.5	720	15	277	300	250	350	19	5
200L	318	80	390	420	310	305	355	133	55	110	16	49	10	200	25	510	19	2-M50X1.5	770	17	298	350	300	400	19	5
225S (4-8P)	356	75	435	465	335	286	350	149	60	140	18	53	11	225	28	560	19	2-M50X1.5	825	19	338	400	350	450	19	5
225M (2P)	356	75	435	465	335	311	375	149	55	110	16	49	10	225	28	560	19	2-M50X1.5	820	19	308	400	350	450	19	5
225M (4-8P)	356	75	435	465	335	311	375	149	60	140	18	53	11	225	28	560	19	2-M50X1.5	850	19	338	400	350	450	19	5
250M (2P)	406	100	485	520	385	349	445	168	60	140	18	53	11	250	33	635	24	2-M63X1.5	925	20	357	500	450	550	19	5
250M (4-8P)	406	100	485	520	385	349	445	168	65	140	18	58	11	250	33	635	24	2-M63X1.5	925	20	357	500	450	550	19	5
280S (2P)	457	105	550	570	415	368	490	190	65	140	18	58	11	280	35	695	24	2-M63X1.5	970	22	357	500	450	550	19	5
280S (4-8P)	457	105	550	570	415	368	490	190	75	140	20	68	12	280	35	695	24	2-M63X1.5	990	22	357	500	450	550	19	5
280M (2P)	457	105	550	570	415	419	540	190	65	140	18	58	11	280	35	695	24	2-M63X1.5	1025	22	357	500	450	550	19	5
280M (4-8P)	457	105	550	570	415	419	540	190	75	140	20	68	12	280	35	695	24	2-M63X1.5	1045	22	357	500	450	550	19	5
315S (2P)	508	125	630	650	500	406	515	216	65	140	18	58	11	315	45	815	28	2-M63X1.5	1160	24	391	600	550	660	24	6
315M (2P)	508	125	630	650	500	457	625	216	65	140	18	58	11	315	45	815	28	2-M63X1.5	1270	24	391	600	550	660	24	6
315L (2P)	508	125	630	650	500	508	625	216	65	140	18	58	11	315	45	815	28	2-M63X1.5	1270	24	391	600	550	660	24	6
315S (4-8P)	508	125	630	650	500	406	515	216	80	170	22	71	14	315	45	815	28	2-M63X1.5	1190	24	421	600	550	660	24	6
315M (4-8P)	508	125	630	650	500	457	625	216	80	170	22	71	14	315	45	815	28	2-M63X1.5	1300	24	421	600	550	660	24	6
315L (4-8P)	508	125	630	650	500	508	625	216	80	170	22	71	14	315	45	815	28	2-M63X1.5	1300	24	421	600	550	660	24	6
355M (2P)	610	115	725	735	645	560	750	254	75	140	20	68	12	355	52	1000	28	2-M63X1.5	1600	25	420	740	680	800	24	6
355L (2P)	610	115	725	735	645	630	750	254	75	140	20	68	12	355	52	1000	28	2-M63X1.5	1600	25	420	740	680	800	24	6
355M (4-8P)	610	115	725	735	645	560	750	254	95	170	25	86	14	355	52	1000	28	2-M63X1.5	1630	25	450	740	680	800	24	6
355L (4-8P)	610	115	725	735	645	630	750	254	95	170	25	86	14	355	52	1000	28	2-M63X1.5	1630	25	450	740	680	800	24	6

2 Pole

Technical Data

Power (kW)	Frame Size	Rated Current (A)										Speed (rpm)		Efficiency (%)			P.F. cosφ			Rated Torque (N.m)	Tst (Tn)	Tmax (Tn)	Ist (In)	Noise, dB (A) no load	Weight (kg)	Inertia (kgm ²)
		220V	380V	660V	230V	400V	690V	240V	415V	720V	50Hz	60Hz	1	0.75	0.5	1	0.75	0.5								
0.18	IE1-63M1-2	1.1	0.65	0.37	1.07	0.62	0.36	1.03	0.59	0.34	2720	3264	52.8	51.9	49.0	0.80	0.76	0.68	0.63	2.2	2.2	5.6	58	7.6	0.0002	
0.25	IE1-63M2-2	1.4	0.8	0.5	1.4	0.8	0.5	1.3	0.8	0.4	2720	3264	58.2	57.7	54.2	0.80	0.76	0.68	0.88	2.2	2.2	5.6	58	8.5	0.0003	
0.37	IE1-71M1-2	1.9	1.1	0.6	1.8	1.0	0.6	1.7	1.0	0.6	2745	3294	63.9	63.4	60.9	0.81	0.77	0.69	1.29	2.2	2.2	6.1	62	9.3	0.0004	
0.55	IE1-71M2-2	2.6	1.5	0.9	2.5	1.4	0.8	2.4	1.4	0.8	2745	3294	69.0	68.7	66.2	0.81	0.77	0.69	1.91	2.2	2.2	6.1	10	0.0005	62	
0.75	IE1-80M1-2	3.3	1.9	1.1	3.2	1.8	1.1	3.1	1.8	1.0	2830	3396	72.1	71.7	69.9	0.82	0.78	0.70	2.53	2.2	2.3	6.1	15	0.0008	67	
1.1	IE1-80M2-2	4.6	2.7	1.6	4.4	2.6	1.5	4.3	2.5	1.4	2830	3396	75.0	74.7	73.5	0.83	0.79	0.71	3.71	2.2	2.3	6.9	16	0.001	67	
1.5	IE1-90S-2	6.1	3.5	2.0	5.8	3.3	1.9	5.6	3.2	1.9	2840	3408	77.2	76.9	76.0	0.84	0.80	0.71	5.04	2.2	2.3	7.0	21	0.0015	72	
2.2	IE1-90L-2	8.5	4.9	2.8	8.2	4.7	2.7	7.8	4.5	2.6	2840	3408	79.7	79.4	78.5	0.85	0.81	0.72	7.40	2.2	2.3	7.0	24	0.0021	72	
3	IE1-100L-2	11.1	6.4	3.7	10.6	6.1	3.5	10.2	5.9	3.4	2870	3444	81.5	81.3	80.0	0.87	0.83	0.74	9.98	2.2	2.3	7.5	31	0.0032	76	
4	IE1-112M-2	14.4	8.3	4.8	13.7	7.9	4.6	13.2	7.6	4.4	2890	3468	83.1	82.9	81.8	0.88	0.84	0.75	13.22	2.2	2.3	7.5	40	0.0058	77	
5.5	IE1-132S1-2	19.4	11.2	6.5	18.5	10.7	6.2	17.8	10.3	5.9	2900	3480	84.7	84.5	83.3	0.88	0.84	0.75	18.11	2.2	2.3	7.5	56	0.0058	80	
7.5	IE1-132S2-2	25.7	14.9	8.6	24.6	14.1	8.2	23.6	13.6	7.9	2900	3480	86.0	85.8	84.6	0.89	0.85	0.76	24.70	2.2	2.3	7.5	60	0.0122	80	
11	IE1-160M1-2	37.0	21.4	12.3	35.4	20.4	11.8	33.9	19.6	11.3	2930	3516	87.6	87.3	86.6	0.89	0.85	0.76	35.85	2.2	2.3	7.5	107	0.0359	86	
15	IE1-160M2-2	49.9	28.9	16.6	47.7	27.4	15.9	45.7	26.4	15.2	2930	3516	88.7	88.4	86.9	0.89	0.85	0.76	48.89	2.2	2.3	7.5	114	0.0434	86	
18.5	IE1-160L-2	61.1	35.4	20.4	58.4	33.6	19.5	56.0	32.4	18.7	2930	3516	89.3	89.2	88.2	0.89	0.85	0.76	60.30	2.2	2.3	7.5	130	0.0548	86	
22	IE1-180M-2	72.2	41.8	24.1	69.0	39.7	23.0	66.1	38.3	22.0	2940	3528	89.9	89.5	87.8	0.89	0.85	0.76	71.46	2.0	2.3	7.5	162	0.0802	89	
30	IE1-200L1-2	97.5	56.5	32.5	93.3	53.6	31.1	89.4	51.7	29.8	2950	3540	90.7	90.4	89.1	0.89	0.85	0.76	97.12	2.0	2.3	7.5	232	0.146	92	
37	IE1-200L2-2	119.6	69.3	39.9	114.4	65.8	38.1	109.7	63.4	36.6	2950	3540	91.2	91.0	89.9	0.89	0.85	0.76	119.78	2.0	2.3	7.5	251	0.1779	92	
45	IE1-225M-2	144.7	83.8	48.2	138.4	79.6	46.1	132.6	76.7	44.2	2970	3564	91.7	91.4	90.2	0.89	0.85	0.76	144.70	2.0	2.3	7.5	281	0.2177	92	
55	IE1-250M-2	176.1	102.0	58.7	168.4	96.9	56.1	161.4	93.4	53.8	2970	3564	92.1	91.7	90.4	0.89	0.85	0.76	176.85	2.0	2.3	7.5	379	0.3251	93	
75	IE1-280S-2	238.6	138.0	79.5	228.2	131.0	76.1	218.7	126.0	72.9	2970	3564	92.7	92.2	90.8	0.89	0.85	0.76	241.16	2.0	2.3	7.0	477	0.5205	94	
90	IE1-280M-2	285.4	165.0	95.1	273.0	157.0	91.0	261.6	151.0	87.2	2970	3564	93.0	92.6	91.4	0.89	0.85	0.76	289.39	2.0	2.3	7.1	530	0.631	94	
110	IE1-315S-2	-	199.0	114.6	-	189.0	109.6	-	182.0	105.0	2980	3576	93.3	92.8	91.5	0.90	0.86	0.77	352.52	1.8	2.2	7.1	96	762	1.2692	
132	IE1-315M-2	-	238.0	137.2	-	226.0	131.3	-	218.0	125.8	2980	3576	93.5	93.1	92.0	0.90	0.86	0.77	423.02	1.8	2.2	7.1	96	871	1.4505	
160	IE1-315L1-2	-	285.0	164.0	-	271.0	156.8	-	261.0	150.3	2980	3576	93.8	93.3	92.0	0.91	0.86	0.77	512.75	1.8	2.2	7.1	99	958	1.8131	
185	IE1-315L2-2	-	329.0	189.4	-	313.0	181.2	-	301.0	173.6	2980	3576	93.9	93.4	92.1	0.91	0.86	0.77	592.87	1.8	2.2	7.1	99	1020	2.357	
200	IE1-315L3-2	-	355.0	204.5	-	337.0	195.6	-	325.0	187.5	2980	3576	94.0	93.6	92.5	0.91	0.86	0.77	640.94	1.8	2.2	7.1	99	1088	2.357	
220	IE1-355M1-2	-	391.0	225.0	-	371.0	215.2	-	358.0	206.2	2980	3576	94.0	93.6	92.5	0.91	0.86	0.77	705.03	1.6	2.2	7.1	103	1465	2.7299	
250	IE1-355M2-2	-	444.0	255.7	-	422.0	244.6	-	407.0	234.4	2980	3576	94.0	93.7	92.6	0.91	0.86	0.77	801.17	1.6	2.2	7.1	103	1572	3.2418	
280	IE1-355L1-2	-	497.0	286.3	-	472.0	273.9	-	455.0	262.5	2980	3576	94.0	93.7	92.6	0.91	0.86	0.77	897.32	1.6	2.2	7.1	103	1712	3.9243	
315	IE1-355L2-2	-	560.0	322.1	-	532.0	308.1	-	512.0	295.3	2980	3576	94.0	93.7	92.6	0.91	0.86	0.77	1009.48	1.6	2.2	7.1	103	1789	4.2655	

4 Pole

Technical Data

Power (kW)	Frame Size	Rated Current (A)										Speed (rpm)		Efficiency (%)			P.F. cosφ			Rated Torque (N.m)	Tst (Tn)	Tmax (Tn)	Ist (In)	Noise, dB (A) no load	Weight (kg)	Inertia (kgm ²)
		220V	380V	660V	230V	400V	690V	240V	415V	720V	50Hz	60Hz	1	0.75	0.5	1	0.75	0.5								
0.12	IE1-63M1-4	0.9	0.5	0.3	0.8	0.5	0.3	0.8	0.5	0.3	1335	1602	50.0	49.0	46.9	0.72	0.68	0.61	0.9	2.0	2.2	4.4	52	7.3	0.0004	
0.18	IE1-63M2-4	1.1	0.7	0.4	1.1	0.6	0.4	1.0	0.6	0.4	1335	1602	57.0	56.1	53.2	0.73	0.69	0.62	1.3	2.0	2.2	4.4	52	8.2	0.0005	
0.25	IE1-71M1-4	1.4	0.8	0.5	1.4	0.8	0.5	1.3	0.8	0.4	1340	1608	61.5	60.9	58.1	0.74	0.7	0.63	1.8	2.0	2.2	5.2	55	9	0.0007	
0.37	IE1-71M2-4	2.0	1.1	0.7	1.9	1.1	0.6	1.8	1.0	0.6	1340	1608	66.0	65.5	62.6	0.75	0.71	0.64	2.6	2.0	2.2	5.2	55	9.8	0.0008	
0.55	IE1-80M1-4	2.8	1.6	0.9	2.6	1.5	0.9	2.5	1.5	0.8	1390	1668	70.0	69.8	67.1	0.75	0.71	0.64	3.8	2.4	2.3	5.2	58	15	0.0013	
0.75	IE1-80M2-4	3.6	2.1	1.2	3.4	2.0	1.2	3.3	1.9	1.1	1390	1668	72.1	72.0	69.8	0.76	0.72	0.65	5.2	2.3	2.3	6.0	58	16	0.0015	
1.1	IE1-90S-4	5.0	2.9	1.7	4.8	2.7	1.6	4.6	2.6	1.5	1400	1680	75.0	74.7	73.4	0.77	0.73	0.65	7.5	2.3	2.3	6.0	61	21	0.0023	
1.5	IE1-90L-4	6.5	3.8	2.2	6.3	3.6	2.1	6.0	3.5	2.0	1400	1680	77.2	76.9	75.6	0.78	0.74	0.66	10.2	2.3	2.3	6.0	61	23	0.0028	
2.2	IE1-100L1-4	9.1	5.2	3.0	8.7	5.0	2.9	8.3	4.8	2.8	1430	1716	79.7	79.5	78.3	0.8	0.76	0.68	14.7	2.3	2.3	7.0	64	31	0.0058	
3	IE1-100L2-4	11.9	6.9	4.0	11.4	6.6	3.8	10.9	6.3	3.6	1430	1716	81.5	81.3	80.1	0.81	0.77	0.69	20.0	2.3	2.3	7.0	64	34	0.0076	
4	IE1-112M-4	15.6	9.0	5.2	14.9	8.6	5.0	14.3	8.3	4.8	1440	1728	83.1	82.8	81.6	0.81	0.77	0.69	26.5	2.3	2.3	7.0	65	43	0.0126	
5.5	IE1-132S-4	20.5	11.9	6.8	19.6	11.3	6.6	18.8	10.9	6.3	1440	1728	84.7	84.5	83.3	0.83	0.79	0.71	36.5	2.3	2.3	7.0	71	61	0.0268	
7.5	IE1-132M-4	27.6	16.0	9.2	26.4	15.2	8.8	25.3	14.6	8.4	1440	1728	86.0	85.8	84.6	0.83	0.79	0.71	49.7	2.3	2.3	7.0	71	71	0.0345	
11	IE1-160M-4	38.8	22.4	12.9	37.1	21.3	12.4	35.5	20.6	11.9	1470	1764	87.6	87.4	86.3	0.85	0.81	0.72	71.5	2.2	2.3	7.0	75	112	0.0748	
15	IE1-160L-4	51.6	29.9	17.2	49.4	28.4	16.5	47.3	27.4	15.8	1470	1764	88.7	88.5	87.4	0.86	0.82	0.73	97.5	2.2	2.3	7.5	75	134	0.1028	
18.5	IE1-180M-4	63.2	36.6	21.1	60.5	34.8	20.2	58.0	33.5	19.3	1475	1770	89.3	89.1	88.0	0.86	0.82	0.73	119.8	2.2	2.3	7.5	76	163	0.146	
22	IE1-180L-4	74.7	43.2	24.9	71.4	41.1	23.8	68.5	39.6	22.8	1475	1770	89.9	89.7	88.6	0.86	0.82	0.73	142.4	2.2	2.3	7.5	76	178	0.1642	
30	IE1-200L-4	100.9	58.4	33.7	96.6	55.5	32.2	92.5	53.5	30.8	1475	1770	90.7	90.5	89.4	0.86	0.82	0.73	194.2	2.2	2.3	7.2	79	237	0.2612	
37	IE1-225S-4	123.8	71.7	41.3	118.4	68.1	39.5	113.5	65.6	37.8	1480	1776	91.2	91.1	90.1	0.86	0.82	0.73	238.8	2.2	2.3	7.2	81	284	0.457	
45	IE1-225M-4	149.8	86.7	49.9	143.2	82.4	47.8	137.3	79.4	45.8	1480	1776	91.7	91.5	90.4	0.86	0.82	0.73	290.4	2.2	2.3	7.2	81	313	0.5511	
55	IE1-250M-4	182.2	106.0	60.8	174.3	100.0	58.1	167.1	96.6	55.7	1485	1782	92.1	92.0	91.1	0.86	0.82	0.73	353.7	2.2	2.3	7.2	83	389	0.6478	
75	IE1-280S-4	241.3	140.0	80.4	230.8	133.0	76.9	221.2	128.0	73.7	1485	1782	92.7	92.5	91.5	0.88	0.84	0.75	482.3	2.2	2.3	6.8	86	503	1.1785	
90	IE1-280M-4	288.6	167.0	96.2	276.1	159.0	92.0	264.6	153.0	88.2	1485	1782	93.0	92.8	91.9	0.88	0.84	0.75	578.8	2.2	2.3	6.8	86	556	1.39	
110	IE1-315S-4	347.7	201.0	115.9	332.5	191.0	110.9	318.7	184.0	106.2	1490	1788	93.3	93.0	92.0	0.89	0.85	0.76	705.0	2.1	2.2	6.9	93	778	2.5752	
132	IE1-315M-4	416.3	241.0	138.8	398.2	229.0	132.7	381.6	221.0	127.2	1490	1788	93.5	93.4	92.6	0.89	0.85	0.76	846.0	2.1	2.2	6.9	93	892	2.9111	
160	IE1-315L1-4	503.0	291.0	167.7	481.1	277.0	160.4	461.1	267.0	153.7	1490	1788	93.8	93.8	93.1	0.89	0.85	0.76	1025.5	2.1	2.2	6.9	97	973	3.5829	
185	IE1-315L2-4	581.0	336.0	193.7	555.7	320.0	185.2	532.6	308.0	177.5	1490	1788	93.9	93.9	93.2	0.89	0.85	0.76	1185.7	2.1	2.2	6.9	97	1024	4.0308	
200	IE1-315L3-4	620.4	359.0	206.8	593.5	341.0	197.8	568.7	329.0	189.6	1490	1788	94.0	93.9	93.0	0.9	0.86	0.77	1281.9	2.1	2.2	6.9	97	1111	4.7026	
220	IE1-355M1-4	-	395.0	227.5	-	375.0	217.6	-	362.0	208.5	1490	1788	94.0	94.1	94.0	0.9	0.86	0.77	1410.1	2.1	2.2	6.9	101	1508	6.3033	
250	IE1-355M2-4	-	449.0	258.5	-	427.0	247.3	-	411.0	237.0	1490	1788	94.0	94.1	94.0	0.9	0.86	0.77	1602.4	2.1	2.2	6.9	101	1599	7.2583	
280	IE1-355L1-4	-	503.0	289.5	-	478.0	276.9	-	460.0	265.4	1490	1788	94.0	94.1	94.0	0.9	0.86	0.77	1794.6	2.1	2.2	7.1	101	1650	7.8314	
315	IE1-355L2-4	-	566.0	325.7	-	537.0	311.6	-	518.0	298.6	1490	1788	94.0	94.1	94.0	0.9	0.86	0.77	2019.0	2.1	2.2	7.1	101	1750	8.7864	
355	IE1-355L3-4	-	638.0	367.1	-	606.0	351.1	-	584.0	336.5	1486	1783.2	94.0	94.1	94.0	0.9	0.86	0.77	2281.5	1.8	2.6	6.1	102	1882	9.55045	

6 Pole Technical Data

Power (kW)	Frame Size	Rated Current (A)									Speed (rpm)		Efficiency (%)			P.F. cosφ			Rated Torque (N.m)	Tst (Tn)	Tmax (Tn)	Ist (In)	Noise, dB (A) no load	Weight (kg)	Inertia (kgm ²)
		220V	380V	660V	230V	400V	690V	240V	415V	720V	50Hz	60Hz	1	0.75	0.5	1	0.75	0.5							
0.18	IE1-71M1-6	1.6	0.9	0.5	1.5	0.9	0.5	1.4	0.8	0.5	855	1026	45.5	45.4	43.1	0.66	0.63	0.56	2.0	1.9	2.0	4.0	51	6.8	0.0011
0.25	IE1-71M2-6	1.9	1.1	0.6	1.8	1.0	0.6	1.7	1.0	0.6	855	1026	52.1	52.0	49.7	0.68	0.65	0.58	2.8	1.9	2.0	4.0	51	7.8	0.0013
0.37	IE1-80M1-6	2.3	1.3	0.8	2.2	1.3	0.7	2.1	1.2	0.7	885	1062	59.7	59.5	57.7	0.7	0.67	0.6	4.0	1.9	2.0	4.7	54	15	0.0015
0.55	IE1-80M2-6	3.1	1.8	1.0	2.9	1.7	1.0	2.8	1.6	0.9	885	1062	65.8	65.6	63.9	0.72	0.68	0.61	5.9	1.9	2.1	4.7	54	16	0.0022
0.75	IE1-90S-6	3.9	2.3	1.3	3.7	2.1	1.3	3.6	2.1	1.2	910	1092	70.0	69.8	68.2	0.72	0.68	0.61	7.9	2.0	2.1	4.7	57	21	0.0033
1.1	IE1-90L-6	5.4	3.1	1.8	5.2	3.0	1.7	5.0	2.9	1.7	910	1092	72.9	72.7	71.1	0.73	0.69	0.62	11.5	2.0	2.1	5.3	57	23	0.0041
1.5	IE1-100L-6	7.0	4.0	2.3	6.7	3.8	2.2	6.4	3.7	2.1	920	1104	75.2	75.0	73.5	0.75	0.71	0.64	15.6	2.0	2.1	5.5	61	30	0.0075
2.2	IE1-112M-6	9.8	5.7	3.3	9.4	5.4	3.1	9.0	5.2	3.0	940	1128	77.7	77.6	76.3	0.76	0.72	0.65	22.4	2.0	2.1	5.5	65	40	0.0147
3	IE1-132S-6	13.0	7.5	4.3	12.4	7.1	4.1	11.9	6.9	4.0	960	1152	79.7	79.7	78.3	0.76	0.72	0.65	29.8	2.1	2.1	6.5	69	55	0.0286
4	IE1-132M1-6	17.0	9.8	5.7	16.2	9.3	5.4	15.6	9.0	5.2	960	1152	81.4	81.2	79.8	0.76	0.72	0.65	39.8	2.1	2.1	6.5	69	64	0.0376
5.5	IE1-132M2-6	22.6	13.1	7.5	21.6	12.4	7.2	20.7	12.0	6.9	960	1152	83.1	82.9	81.6	0.77	0.73	0.65	54.7	2.1	2.1	6.5	69	73	0.0519
7.5	IE1-160M-6	30.2	17.5	10.1	28.9	16.6	9.6	27.7	16.0	9.2	970	1164	84.7	84.5	83.3	0.77	0.73	0.65	73.8	2.0	2.1	6.5	73	107	0.0862
11	IE1-160L-6	42.8	24.8	14.3	41.0	23.6	13.7	39.3	22.7	13.1	970	1164	86.4	86.2	84.9	0.78	0.74	0.66	108.0	2.0	2.1	6.5	73	131	0.1292
15	IE1-180L-6	55.4	32.1	18.5	53.0	30.5	17.7	50.8	29.4	16.9	970	1164	87.7	87.5	85.2	0.81	0.77	0.69	148.0	2.0	2.1	7.0	73	169	0.2174
18.5	IE1-200L1-6	67.7	39.2	22.6	64.7	37.2	21.6	62.0	35.9	20.7	970	1164	88.6	88.4	87.2	0.81	0.77	0.69	182.0	2.1	2.1	7.0	76	217	0.3132
22	IE1-200L2-6	78.0	45.1	26.0	74.6	42.9	24.9	71.5	41.3	23.8	970	1164	89.2	89.0	87.8	0.83	0.79	0.71	217.0	2.0	2.1	7.0	76	232	0.3654
30	IE1-225M-6	103.9	60.2	34.6	99.4	57.2	33.1	95.3	55.1	31.8	980	1176	90.2	90.0	88.7	0.84	0.8	0.71	292.0	2.0	2.1	7.0	76	292	0.6137
37	IE1-250M-6	124.4	72.0	41.5	118.9	68.4	39.7	114.0	65.9	38.0	980	1176	90.8	90.6	89.4	0.86	0.82	0.73	361.0	2.1	2.1	7.0	78	366	0.8368
45	IE1-280S-6	150.2	87.0	50.1	143.7	82.6	47.9	137.7	79.6	45.9	980	1176	91.4	91.2	90.0	0.86	0.82	0.73	439.0	2.1	2.0	7.0	80	470	1.4151
55	IE1-280M-6	182.6	106.0	60.9	174.7	100.0	58.2	167.4	96.8	55.8	980	1176	91.9	91.7	90.5	0.86	0.82	0.73	536.0	2.1	2.0	7.0	80	518	1.6649
75	IE1-315S-6	247.2	143.0	82.4	236.4	136.0	78.8	226.6	131.0	75.5	990	1188	92.6	92.5	91.3	0.86	0.82	0.73	723.0	2.0	2.0	6.7	85	723	2.951
90	IE1-315M-6	295.6	171.0	98.6	282.8	163.0	94.3	271.0	157.0	90.3	990	1188	92.9	92.8	91.6	0.86	0.82	0.73	868.0	2.0	2.0	6.7	85	857	3.6887
110	IE1-315L1-6	359.8	208.0	119.9	344.1	198.0	114.7	329.8	191.0	109.9	990	1188	93.3	93.2	92.0	0.86	0.82	0.73	1061.0	2.0	2.0	6.7	85	933	4.574
132	IE1-315L2-6	425.9	247.0	142.0	407.4	234.0	135.8	390.4	226.0	130.1	990	1188	93.5	93.4	92.2	0.87	0.83	0.74	1273.0	2.0	2.0	6.7	85	1008	5.4593
160	IE1-355M1-6	508.7	295.0	169.6	486.6	280.0	162.2	466.3	270.0	155.4	990	1188	93.8	93.8	92.8	0.88	0.84	0.75	1543.0	1.9	2.0	6.7	92	1439	7.6441
185	IE1-355M2-6	587.6	340.0	195.9	562.0	323.0	187.3	538.6	311.0	179.5	990	1188	93.9	93.9	92.9	0.88	0.84	0.75	1785.0	1.9	2.0	6.7	92	1507	8.5996
200	IE1-355M3-6	634.5	367.0	211.5	606.9	349.0	202.3	581.7	336.0	193.9	990	1188	94.0	94.0	93.0	0.88	0.84	0.75	1929.0	1.9	2.0	6.7	92	1570	9.5551
220	IE1-355L1-6	-	404.0	232.7	-	384.0	222.5	-	370.0	213.3	990	1188	94.0	94.0	93.0	0.88	0.84	0.75	2122.0	1.9	2.0	6.7	92	1631	10.5106
250	IE1-355L2-6	-	459.0	264.4	-	436.0	252.9	-	420.0	242.4	990	1188	94.0	94.0	93.0	0.88	0.84	0.75	2412.0	1.9	2.0	6.7	92	1731	11.9439
280	IE1-355L3-6	-	514.0	296.1	-	489.0	283.2	-	471.0	271.4	990	1188	94.0	94.0	93.0	0.88	0.84	0.75	2701.0	1.9	2.0	6.7	92	1832	13.3771
315	IE1-355L4-6	-	592.0	340.9	-	562.0	326.1	-	542.0	312.5	991	1189.2	94.0	94.0	93.0	0.86	0.82	0.73	3036.0	1.7	1.9	6.5	92	2070	14.3804

8 Pole

Technical Data

Power (kW)	Frame Size	Rated Current (A)									Speed (rpm)		Efficiency (%)			P.F. cosφ			Rated Torque (N.m)	Tst (Tn)	Tmax (Tn)	Ist (In)	Noise, dB (A) no load	Weight (kg)	Inertia (kgm²)
		220V	380V	660V	230V	400V	690V	240V	415V	720V	50Hz	60Hz	1	0.75	0.5	1	0.75	0.5							
0.18	IE1-80M1-8	1.6	0.9	0.5	1.5	0.9	0.5	1.5	0.9	0.5	630	756	45.5	45.7	41.6	0.65	0.62	0.55	2.7	1.8	1.9	3.3	52	16	0.0019
0.25	IE1-80M2-8	2.0	1.2	0.7	1.9	1.1	0.6	1.8	1.1	0.6	630	756	50.3	50.5	46.2	0.65	0.62	0.55	3.8	1.8	1.9	3.3	52	17	0.0023
0.37	IE1-90S-8	2.6	1.5	0.9	2.5	1.5	0.8	2.4	1.4	0.8	660	792	55.9	55.3	53.4	0.66	0.63	0.56	5.4	1.8	1.9	4.0	56	21	0.0035
0.55	IE1-90L-8	3.6	2.1	1.2	3.4	2.0	1.1	3.3	1.9	1.1	660	792	60.9	60.3	58.4	0.66	0.63	0.56	8.0	1.8	2.0	4.0	56	23	0.0041
0.75	IE1-100L1-8	4.5	2.6	1.5	4.3	2.4	1.4	4.1	2.4	1.4	690	828	66.0	65.1	64.0	0.67	0.64	0.57	10.4	1.8	2.0	4.0	59	27	0.0057
1.1	IE1-100L2-8	6.0	3.5	2.0	5.7	3.3	1.9	5.5	3.2	1.8	690	828	70.2	69.9	68.0	0.69	0.66	0.59	15.2	1.8	2.0	5.0	59	31	0.0085
1.5	IE1-112M-8	7.6	4.4	2.5	7.3	4.2	2.4	7.0	4.0	2.3	690	828	74.0	73.2	71.3	0.7	0.67	0.6	20.8	1.8	2.0	5.0	61	39	0.0139
2.2	IE1-132S-8	10.8	6.3	3.6	10.4	6.0	3.5	9.9	5.7	3.3	710	852	75.0	75.5	72.5	0.71	0.67	0.6	29.6	1.8	2.0	6.0	64	56	0.0304
3	IE1-132M-8	14.0	8.1	4.7	13.4	7.7	4.5	12.8	7.4	4.3	710	852	77.0	77.9	75.0	0.73	0.69	0.62	40.4	1.8	2.0	6.0	64	66	0.0412
4	IE1-160M1-8	18.2	10.5	6.1	17.4	10.0	5.8	16.6	9.6	5.6	720	864	79.2	79.1	77.5	0.73	0.69	0.62	53.1	1.9	2.0	6.0	68	97	0.0627
5.5	IE1-160M2-8	24.0	13.9	8.0	22.9	13.2	7.6	22.0	12.7	7.3	720	864	81.4	81.5	79.7	0.74	0.7	0.63	73.0	1.9	2.0	6.0	68	108	0.0862
7.5	IE1-160L-8	31.3	18.1	10.4	29.9	17.2	10.0	28.7	16.6	9.6	720	864	83.9	83.8	81.5	0.75	0.71	0.64	99.0	1.9	2.0	6.0	68	127	0.1175
11	IE1-180L-8	45.2	26.2	15.1	43.2	24.8	14.4	41.4	23.9	13.8	730	876	85.2	85.0	82.1	0.75	0.71	0.64	144.0	2.0	2.0	6.5	70	166	0.2042
15	IE1-200L-8	60.1	34.8	20.0	57.5	33.0	19.2	55.1	31.9	18.4	730	876	86.2	85.8	84.5	0.76	0.72	0.65	196.0	2.0	2.0	6.6	73	217	0.3132
18.5	IE1-225S-8	73.5	42.6	24.5	70.3	40.4	23.4	67.4	39.0	22.5	730	876	86.9	87.0	85.5	0.76	0.72	0.65	242.0	1.9	2.0	6.6	73	259	0.4773
22	IE1-225M-8	84.7	49.0	28.2	81.0	46.6	27.0	77.6	44.9	25.9	730	876	87.4	87.4	86.6	0.78	0.74	0.66	288.0	1.9	2.0	6.6	73	278	0.5455
30	IE1-250M-8	112.9	65.3	37.6	108.0	62.1	36.0	103.5	59.8	34.5	740	888	88.3	88.3	87.2	0.79	0.75	0.67	387.0	1.9	2.0	6.5	75	373	0.8861
37	IE1-280S-8	138.4	80.1	46.1	132.4	76.1	44.1	126.9	73.4	42.3	740	888	88.8	88.6	87.9	0.79	0.75	0.67	478.0	1.9	2.0	6.6	76	484	1.54
45	IE1-280M-8	167.6	97.0	55.9	160.3	92.2	53.4	153.6	88.8	51.2	740	888	89.2	89.3	88.2	0.79	0.75	0.67	581.0	1.9	2.0	6.6	76	536	1.8313
55	IE1-315S-8	198.7	115.0	66.2	190.0	109.0	63.3	182.1	105.0	60.7	740	888	89.7	89.9	88.8	0.81	0.77	0.69	710.0	1.8	2.0	6.6	82	721	3.4522
75	IE1-315M-8	269.1	156.0	89.7	257.4	148.0	85.8	246.7	143.0	82.2	740	888	90.3	90.3	89.4	0.81	0.77	0.69	968.0	1.8	2.0	6.2	82	865	4.4016
90	IE1-315L1-8	317.6	184.0	105.9	303.8	175.0	101.3	291.1	168.0	97.0	740	888	90.7	90.7	89.8	0.82	0.78	0.7	1161.0	1.8	2.0	6.4	82	972	5.8688
110	IE1-315L2-8	386.5	224.0	128.8	369.6	213.0	123.2	354.2	205.0	118.1	740	888	91.1	91.2	90.3	0.82	0.78	0.7	1420.0	1.8	2.0	6.4	82	1077	7.2497
132	IE1-355M1-8	461.7	267.0	153.9	441.6	254.0	147.2	423.2	245.0	141.1	740	888	91.5	91.6	90.6	0.82	0.78	0.7	1704.0	1.8	2.0	6.4	90	1518	11.1183
160	IE1-355M2-8	557.2	323.0	185.7	533.0	306.0	177.7	510.8	295.0	170.3	740	888	91.9	92.0	91.0	0.82	0.78	0.7	2065.0	1.8	2.0	6.4	90	1630	13.1664
185	IE1-355L1-8	642.2	372.0	214.1	614.3	353.0	204.8	588.7	340.0	196.2	740	888	92.2	92.3	91.2	0.82	0.78	0.7	2388.0	1.8	2.0	6.4	90	1725	15.5071
200	IE1-355L2-8	683.7	396.0	227.9	653.9	376.0	218.0	626.7	362.0	208.9	740	888	92.5	92.7	91.4	0.83	0.79	0.71	2581.0	1.8	2.0	6.4	90	1819	16.6774
220	IE1-355L3-8	752.0	435.0	250.7	719.3	414.0	239.8	689.4	399.0	229.8	740	888	92.5	92.7	91.4	0.83	0.79	0.71	2839.0	1.8	2.0	6.4	90	1940	17.8718

Contact Us

Malaysia

Aflex Ships Equipment Sdn Bhd
No. 8 Jalan Mahir 1,
Taman Perindustrian Cemerlang
81800 Ulu Tiram, Johor, Malaysia

Aflex Ships Equipment Sdn Bhd
Suite 9.01, Level 9, Menara Summit,
Persiaran Kewajipan, USJ 1, UEP,
47600, Subang Jaya, Selangor, Malaysia
Tel: +60 1 2790 0886
Email: sales@aflex.net.my
Website: www.aflex.net.my

United Arab Emirates

Aflex Ships Equipment Trading LLC
(Formerly known as
Aflex Ships Equipment LLC)
W 11, Opp. Zulekha Hospital,
Street No.19, Doha Road,
Al Qusais Industrial 1, Dubai,
United Arab Emirates
Tel: +971 04 2386806
Email: sales@aflex.ae
Website: www.aflex.com.sg

Türkiye

Aflex Ships Equipment
410, Altintepe,
İstasyon Yolu Sokağı No:3,
34840 Maltepe/İstanbul, Türkiye
Tel: +31 6 213 81543
Email: sales@aflex.com.nl
Website: www.aflex.com.sg

India

Aflex Ships Equipment (India Branch)
Office 903, Mayuresh Square, Sector 15,
CBD Belapur, Navi Mumbai 400614,
Maharashtra, India
Tel: +91 9987 294 316
Email: sales@aflex.ae
Website: www.aflex.com.sg

China

Aflex Ships Equipment
(Shanghai) Co., Ltd
Suite B09, 7th Floor,
Kang Ning Building,
No. 1359 Zhong Hua Road
Shanghai 200011, Mainland China
Tel: +86 136 8178 4274
Email: sales@aflex.net.cn
Website: www.aflex.net.cn

Kunshan Branch
Room 1521, Henglong
Hardware City Building B,
No. 567 Xinnan Middle Road,
Kunshan City, Suzhou,
Jiangsu 215300, Mainland China
Tel: +86 0512 5787 3009 / 4009
Email: sales@aflex.net.cn
Website: www.aflex.net.cn

Indonesia

PT. Aflex Pompa dan Peralatan
Soho Podomoro City
20th Floor, Unit 2008,
Jl. Let. Jend. S. Parman, Kav. 28,
South Tanjung Duren,
West Jakarta 11470
Tel: +62 21 3970 8680
Email: sales@aflex.co.id
Website: www.aflex.co.id

Netherlands

Aflex Ships Equipment B.V.
Marconiweg 6 G
2627 BA Delft The Netherlands
Tel: +31 6 213 81543
Email: sales@aflex.com.nl
Website: www.aflex.com.nl

Singapore (Head Office)

Aflex Ships Equipment Pte Ltd
35 Tannery Road
#04-08 Tannery Block,
Ruby Industrial Complex
Singapore 347740
Tel: +65 6293 8680
Email: sales@aflex.com.sg
Website: www.aflex.com.sg

Exclusive Distributor of:



Certification (Singapore):



Member of:

