




DESCRIPTION: Straight type, Rg10 body, metal seated screw down stop valve with rising stem, bolted bonnet. Flat face flanged connection.

APPLICATION: Start/stop and flow control of: Sea water, water and steam etc. Suitable as sea direct.

STANDARD & DESIGN:

Design Code: -
 Inspection Std.: -
 End Std.: -
 Face to Face Std.: -
 Flanges drilled: PN16(DN15-DN100)
 Pressure rating: PN16(DN15-DN100)

VARIATIONS: Can be supplied with regulating disc and non return disc.
 Other dimensions and materials on request.

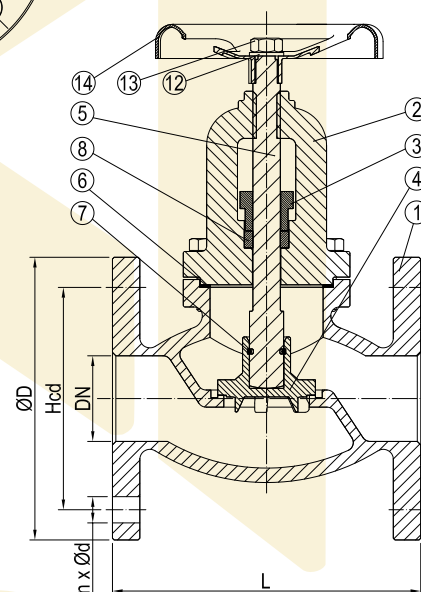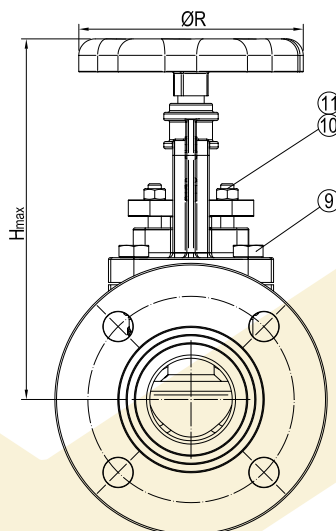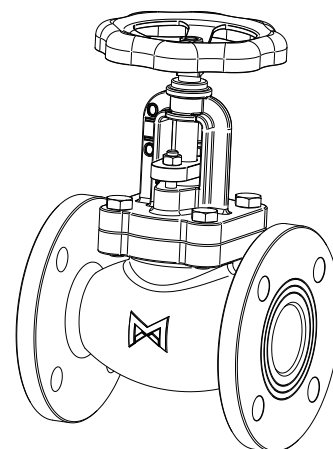

No	Part	Material	Code
1	Body	Bronze	CC 482K
2	Bonnet	Bronze	CC 482K
3	Gland	Bronze	CC 482K
4	Disc	Bronze	CC 481K
5	Stem	Al Bronze	CC 333G
6	Bonnet Gasket	Dixo 4000	-
7	Fixing Ring	Phospor Bronze	-
8	Stem Packing	Graphite	-
9	Bolt	Stainless Steel	EN 1.4404
10	Stud	Stainless Steel	EN 1.4404
11	Nut	Stainless Steel	EN 1.4404
12	Washer	Stainless Steel	EN 1.4404
13	Nut	Stainless Steel	EN 1.4404
14	Handwheel	Cast Iron	EN JS1030

DN	n x ød	Hcd	øD	L	H _{max}	øR	Kg
15	4x14	65	95	100	155	100	2.2
20	4x14	75	105	110	155	100	2.7
25	4x14	85	115	120	155	100	3.8
32	4x18	100	140	135	180	100	6.1
40	4x18	110	150	150	205	140	8.5
50	4x18	125	165	180	210	140	11.6
65	4x18	145	185	200	253	140	14.6
80	8x18	160	200	230	290	200	18.9
100	8x18	180	220	280	340	200	29.8