




TEMPERATURE & PRESSURE CALIBRATORS

TEMPERATURE



Range: 50°C to 600°C
Resolution: 0.1°C
Display: 4 Digit LED Display
Accuracy: $\pm 1.5^{\circ}\text{C}$
Stability: $\pm 0.4^{\circ}\text{C}$
Temperature Readout: $^{\circ}\text{C}/^{\circ}\text{F}$ Switchable
Well Diameter: 30 mm

SUITABLE
FOR
MARINE
INDUSTRIES /
APPLICATIONS

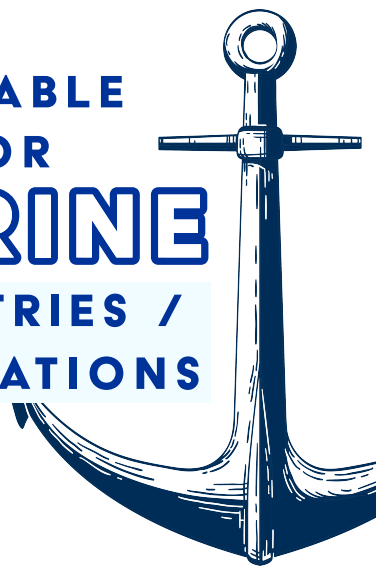

Ranges: -0.85 to 40 bar
Accuracy: $\pm 0.1\%$ F.S.
Display: 5 Full Digit High Contrast LCD Display
Engineering Units: Kg/cm², bar, psi, kPa, inHg, inWc, mmHg, mmWc, mbar, Pascal, MPa
Battery Type & Life: 7.5 VDC Alkaline Battery



P
R
E
S
S
U
R
E

ECONOMY
MODELS

