





CABLES

Marine cable with halogen free outer sheath

Rated voltage 600/1000V flame retardant, 100° C. Main uses and features:
rigid copper screened cables for installation in ships with special fire propagation and low emission of smoke and fumes.

Approved by the major shipping classification bureaus

Cat.No.	mm2	Overall diameter
262711	2 x 1.5	9.5
262718	2 x 2.5	10
262720	3 x 1.5	9.5
262722	3 x 2.5	11
262724	3 x 4	12
262725	3 x 6	13.5
262726	3 x 10	16.5
262730	3 x 16	18.5
262734	3 x 25	22.5
262736	3 x 35	25
262778	3 x 70	33
262737	4 x 1.5	10.5
262738	4 x 2.5	12
262739	4 x 4	13
262740	4 x 6	15
262749	7 x 1.5	12.5
262753	10 x 1.5	16.5
262755	12 x 1.5	17
262760	16 x 1.5	18.5
262763	19 x 1.5	20

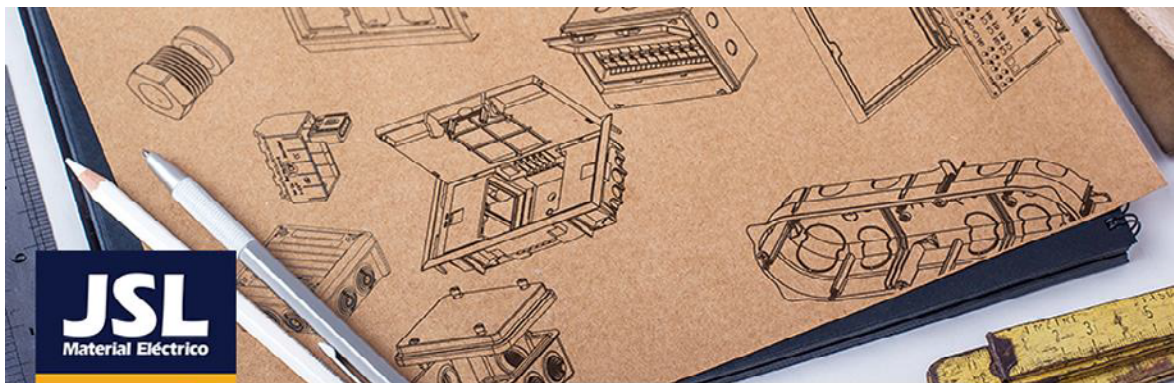

JSL
Material Eléctrico

