


Wire Rope Slings

Slings are available with Standard Soft Eyes or with Heavy Duty Thimbles in either or both eyes.

They are mechanically spliced with swaged ferrules.

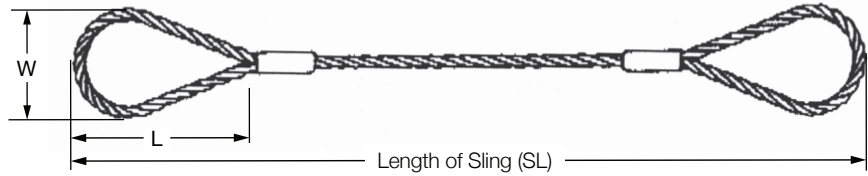


RATED CAPACITIES IN TONS (2000 lbs.) 5 to 1 Design Factor From the Horizontal EIP IWRC RRL PREFORMED WIRE ROPE

Rope Diameter (inches)	Min. Length (SL) (ft. - in.)	W (inches)	L (inches)	Choker Hitch	Vertical Hitch	60° Basket	45° Basket	30° Basket
1/4	1-6	2	4	.48	.65	1.1	.92	.65
3/8	2	3	6	1.1	1.4	2.4	2.0	1.4
1/2	2-6	4	8	1.9	2.5	4.3	3.5	2.5
5/8	3	5	10	2.9	3.9	6.8	5.5	3.9
3/4	3-6	6	12	4.1	5.6	9.7	7.9	5.6
7/8	4	7	14	5.6	7.6	13	11	7.6
1	4-6	8	16	7.2	9.8	17	14	9.8
1-1/8	5	9	18	9.1	12	21	17	12
1-1/4	5-6	10	20	11	15	26	21	15
1-3/8	6	11	22	13	18	31	25	18
1-1/2	7	12	24	16	21	36	30	21
1-3/4	8	14	28	21	28	48	40	28
2	9	16	32	28	37	64	52	37
2-1/4	10	18	36	35	44	76	62	44
2-1/2	11	20	40	42	54	94	76	54
2-3/4	12	22	44	51	65	113	92	65
3	13	24	48	60	77	133	109	77
3-1/2	16-6	32	64	79	102	177	144	102
3-3/4	18	36	72	90	115	199	163	115
4	20	40	80	101	130	225	184	130
4-1/2	24	50	100	124	160	277	226	160

35 x 7 Galvanized Compacted Rotation-Resistant Rope

Nominal Diameter		Break (MT)	Break (ST)	Wgt. kg/m	Wgt. lbs./ft.
mm	inches	(2160 N/mm)			
14		19.6	21.60	1.00	0.6719
16	5/8	25.6	28.22	1.31	0.8802
18		32.4	35.32	1.65	1.1087
19	3/4	36.1	39.79	1.84	1.2363
20		40	44.09	2.04	1.3707
22	7/8	48.4	53.35	2.47	1.6597
24		57.6	63.49	2.94	1.9755
25	1	62.5	68.89	3.19	2.1435
26		67.6	74.52	3.45	2.3182
28	1-1/8	78.4	86.42	4.00	2.6877
30		90	99.21	4.59	3.0842
32	1-1/4	102.4	112.88	5.22	3.5075
34		115.6	127.43	5.90	3.9644
35	1-3/8	122.5	135.03	6.25	4.1996



35 x 7 Galv. Compacted



4 x 39 Galv. Fiber Core

4 x 39 Galvanized Fiber Core Rope

Non-rotating • Resists deformation • Long fatigue life

Diameter		Minimum Breaking Strength	Approx. Weight	
mm	inches		lbs.	kg/m
12	1/2	20680	0.59	0.3964
14		28160	0.81	0.5443
16	5/8	49600	1.05	0.7055
18		46640	1.33	0.8937
19	3/4	51920	1.48	0.9945
20		57640	1.65	1.1087
22	7/8	69740	1.99	1.3371
24		82940	2.37	1.5925
25	1	89980	2.57	1.7269
26		97240	2.78	1.8680
28	1-1/8	112860	3.23	2.1703
30		129580	3.7	2.4861
32	1-1/4	147400	4.21	2.8288
34	1-3/8	166540	4.76	3.1984

MT = Metric tons ST = Short tons

Complete inventories of Wire Rope,
Fiber Rope (Natural & Synthetic) and Rigging Hardware
Mechanical Splicing of Wire Rope up to 5" Diameter

Quick delivery to any port in North America from our warehouses
in the New York, Houston and New Orleans port areas



TradeNet ID: 55968

ATLANTIC CORDAGE

35 Mileed Way, P.O. Box 30 • Avenel, NJ 07001-0030
Tel: (732) 574-0700 • Fax: (732) 574-9191

E-Mail: sales@atlantic-group.com
Web Site: http://www.atlantic-group.com

Contact us for a FREE Product Catalog