

STI MARINE

Marine Cable Coating

Latex-based fire-protective coating for use in limiting flame spread along grouped electrical cables.

PRODUCT FEATURES:


- Tested to IEC 60331-21 and IEC 60332-3-22
- Water based for easy cleanup
- High solids formula; easy to build up required thickness
- Resistant to aging and weathering
- Non-corrosive and non-conductive
- Fast Curing
- Ozone and UV Resistant
- Excellent chemical resistance protects in polluted or corrosive environments
- Provides superior sealing function to prevent passage of fire, smoke, hot gases, sound, conditioned air, and water.
- Easy to install and easy to repair

INSTALLATION INSTRUCTIONS:

General Note: Read Safety Data Sheets (SDS) and product label for safe handling.

Step 1: All surfaces shall be clean, sound, dry, frost-free, and free of bond-breaking contaminants and loose material.

Step 2: Apply coating to 1/8" (3.2 mm) thickness by brush or airless sprayer. Allow coating to dry for 24 hours before exposure to moisture

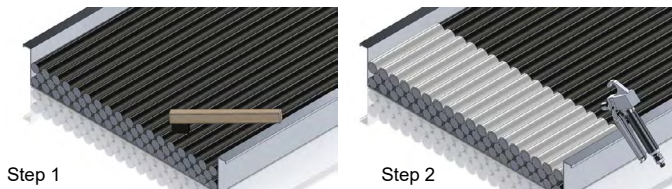

MAINTENANCE:



This product is maintenance free. Observed damage can be repaired with Marine Cable Coating per the original approved design.

ORDERING INFORMATION

WWM Item #	Description
STI-MCC105	5-gallon pail; 1155 cubic inches (19L)

WARRANTY INFORMATION:

STI typically warrants its products for one full year. For complete details of our standard warranty, please visit www.stimarine.com/warranty.

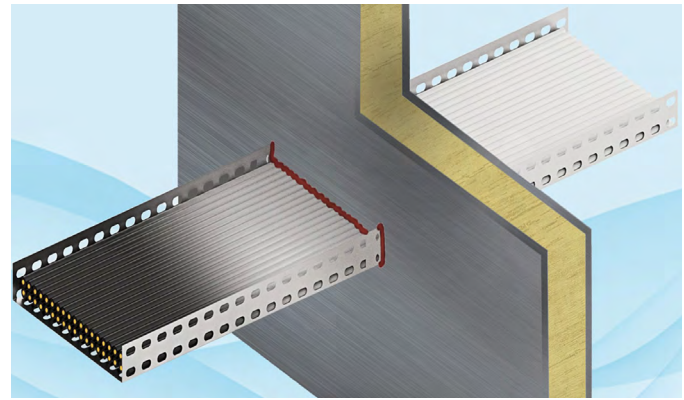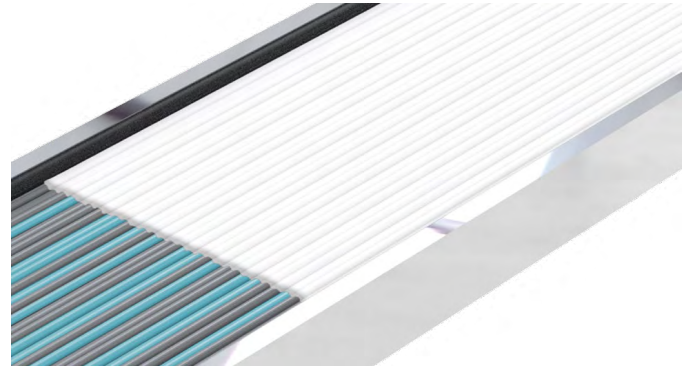

Property (As Supplied)	Value
Consistency:	Coating
Odor:	Mild Latex
Weight Per Gallon:	10 lb (1.2 kg/L)
Specific Gravity:	1.1
Solids:	74% 40
Storage Temperature:	40°F - 95°F (4°C - 35°C)
Application Temperature:	40°F - 95°F (4°C - 35°C)
Shelf Life:	2 Years
Coverage:	12.8 sq ft/gallon @ 1/8" (0.31 m ² /L @ 3mm)
Tack Free Time:	< 2 Hours
Drying Time:	24 - 48 Hours (dependent on temp. and humidity)
Property - Cured	Value
Color	White
In-Service Temperature:	< 185° F (85° C)
Flame Spread:	0
Smoke Development:	15



EAST COAST
Branchburg, NJ
Tel: 732.247.2300
Fax: 732.247.7258

GULF COAST
Houston, TX
Tel: 713.682.2400
Fax: 713.682.2624

SOUTHEAST
Davie, FL
Tel: 954.321.0784
Fax: 954.321.2591

WEST COAST
Paramount, CA
Tel: 562.633.4141
Fax: 562.633.3280