


SEA-LINK PRODUCTS


**MEDIUM WEIGHT OVAL PATTERN CONSTRUCTION BLOCKS\***




Single Sheave Block with Shackle

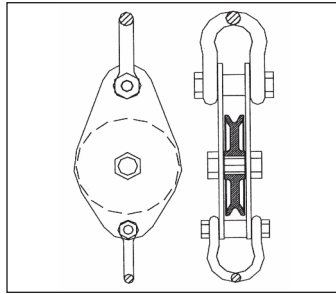

Single Sheave Block with Shackle

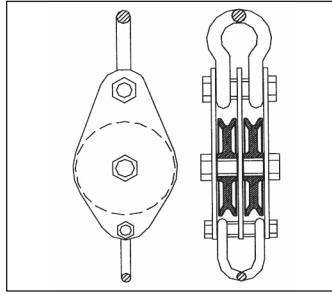

Double Sheave Block with Shackle

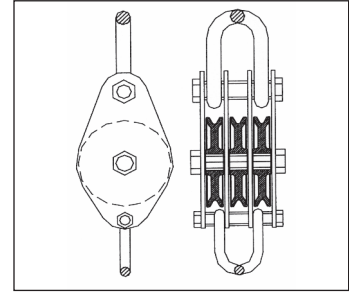


Triple Sheave Block with Shackle

	Size		Model No.	Sheave Size		Rope Diameter		Center Pin Size		Weight		Working Load Limit	
	in.	mm		in.	mm	in.	mm	in.	mm	lbs.	kg	lbs.	kg
SINGLE SHEAVE BLOCK	6	152	SL621B-6S	6	152	1/2	12.7	1-1/2	38	25	11.4	16500	7500
	8	203	SL621B-8S	8	203	1/2	16.0	1-1/2	38	35	15.9	16500	7500
	10	254	SL621B-10S	10	254	5/8	16.0	1-1/2	38	45	20.5	22000	10000
	12	304	SL621B-12S	12	304	3/4	19.0	1-1/2	38	50	22.7	22000	10000
DOUBLE SHEAVE BLOCK	6	152	SL622B-6S	6	152	1/2	12.7	1-1/2	38	40	18.2	22000	10000
	8	203	SL622B-8S	8	203	1/2	16.0	1-1/2	38	50	22.7	22000	10000
	10	254	SL622B-10S	10	254	5/8	16.0	1-1/2	38	65	29.5	33000	15000
	12	304	SL622B-12S	12	304	3/4	19.0	1-1/2	38	75	34.1	33000	15000
TRIPLE SHEAVE BLOCK	6	152	SL623B-6S	6	152	1/2	12.7	1-1/2	38	60	27.3	27500	12500
	8	203	SL623B-8S	8	203	1/2	16.0	1-1/2	38	65	29.5	27500	12500
	10	254	SL623B-10S	10	254	5/8	16.0	1-1/2	38	85	38.6	44000	20000
	12	304	SL623B-12S	12	304	3/4	19.0	1-1/2	38	100	45.5	44000	20000


**EXTRA HEAVY OVAL PATTERN CONSTRUCTION BLOCKS\***




Triple Sheave Block with Shackle

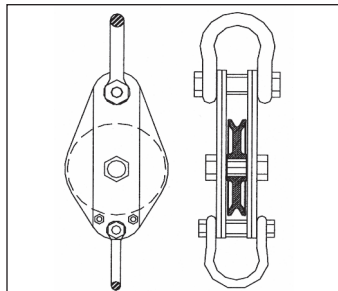

Single Sheave Block with Shackle



Double Sheave Block with Shackle

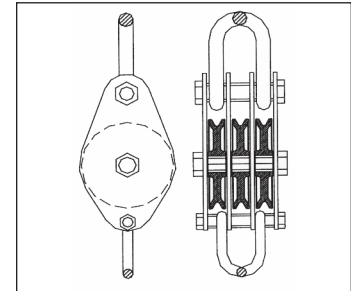

Triple Sheave Block with Shackle

	Size		Model No.	Sheave Size		Rope Diameter		Center Pin Size		Weight		Working Load Limit	
	in.	mm		in.	mm	in.	mm	in.	mm	lbs.	kg	lbs.	kg
SINGLE SHEAVE BLOCK	8	203	SL641B-8S	8	203	5/8 - 3/4	16-19	1-1/2	38	33	15	16500	7500
	10	254	SL641B-10S	10	254	5/8 - 3/4	16-19	2	51	73	33.2	22000	10000
	12	304	SL641B-12S	12	304	5/8 - 3/4	16-19	2-1/4	57	93	42.3	22000	10000
	14	356	SL641B-14S	14	356	3/4 - 7/8	16-19	2-3/4	70	130	59.1	22000	10000
	16	406	SL641B-16S	16	406	7/8 - 1	16-19	3-1/2	89	215	97.7	33000	15000
DOUBLE SHEAVE BLOCK	8	203	SL642B-8S	8	203	5/8 - 3/4	16-19	1-1/2	38	52	23.6	27000	12272
	10	254	SL642B-10S	10	254	5/8 - 3/4	16-19	2	51	110	50	44000	20000
	12	304	SL642B-12S	12	304	3/4 - 7/8	16-19	2-1/4	57	139	63.2	50000	22727
	14	356	SL642B-14S	14	356	7/8 - 1	16-19	2-3/4	70	200	90.9	50000	22727
TRIPLE SHEAVE BLOCK	8	203	SL643B-8S	8	203	5/8 - 3/4	16-19	1-1/2	38	75	34.1	27500	12500
	10	254	SL643B-10S	10	254	5/8 - 3/4	16-19	2	51	135	61.4	44000	20000
	12	304	SL643B-12S	12	304	5/8 - 3/4	16-19	2-1/4	57	181	82.3	44000	20000
	14	356	SL643B-14S	14	356	3/4 - 7/8	16-22	2-3/4	70	240	109.1	70000	31818
	16	406	SL643B-16S	16	406	7/8 - 1	16-22	3-1/2	89	390	177.3	70000	31818

DO NOT EXCEED WORKING LOAD LIMITS

FACTORY CERTIFICATE OF CONFORMANCE INCLUDED WITH EACH BLOCK

**Associated Wire Rope & Rigging, Inc.**  
 8125 Saran Avenue  
 Playa del Rey, CA 90293  
 Tel: 310-448-5444 or 800-901-1135  
 Fax: 310-448-5446  
 sales@awrrinc.com

\*DIAMOND PATTERN ALSO AVAILABLE  
 (700 Series)



AVAILABLE TO MEET  
 U.S. FEDERAL SPECIFICATIONS

**Waterman Supply Co., Inc.**  
 P.O. Box 596  
 Wilmington, CA 90748-3131  
 Tel: 310-522-9698 or 800-322-3131  
 Fax: 310-522-1043  
 sales@watermansupply.com